

Azam's Project Page

TTGO LoRa32 OLED V1



Important: Please notice that we are using **Version 1** or the TTGO LoRa32 module!

The **TTGO LoRa32 OLED V1 module** is based on the ESP32 microcontroller. The ESP32 itself is capable of communicating via WIFI as well as BLE (Bluetooth low energy). The latter can be used to communicate directly with a smartphone. This TTGO module is further equipped with a LoRa transceiver (SX1276, (868/915 MHz) to provide an additional communication channel. Furthermore it has a nice OLED display to communicate with humans.




Fig.: TTGO LoRa32 OLED **V1**.

Image Source: [RandomNerdTutorials](https://www.randomnerdtutorials.com/)

Mount the TTGO LoRa32 V1 module on a breadboard



Read analog potentiometer voltages with TTGO LoRa32 V1

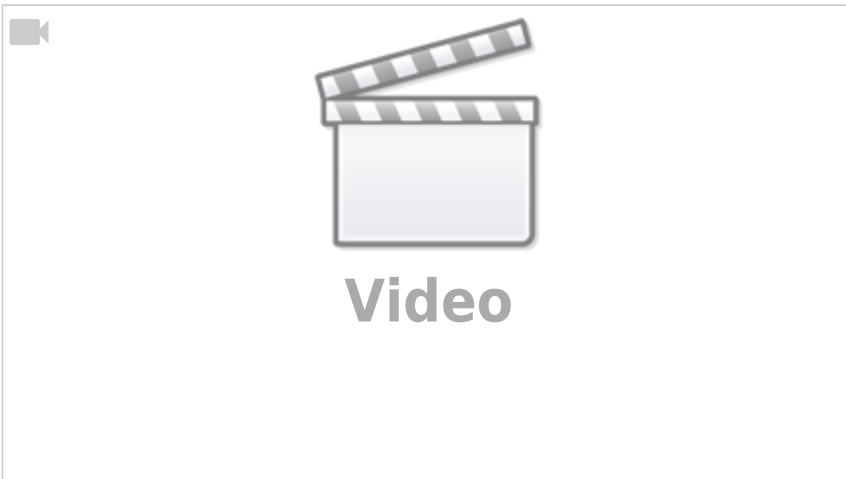

From: <https://student-wiki.eolab.de/> - HSRW EOLab Students Wiki

Permanent link: <https://student-wiki.eolab.de/doku.php?id=emrp2020:azam01:start&rev=1605800817>

Last update: 2023/01/05 14:38

