


# Sceme Lora Node (Prototype)


This device can connect to a Sceme Sensor for measuring soil permittivity and temperature at three different depths. The data gets transmitted to an IoT-Stack for saving the data permanently and displaying it nicely in graphs. The data from a test we run on our terrace can be found here: [Grafana Dashboard](#)

The device is powered by solar and an internal battery. It can also monitor the battery. The battery levels get also logged on the dashboard. This prototype also includes a custom-made circuit board.

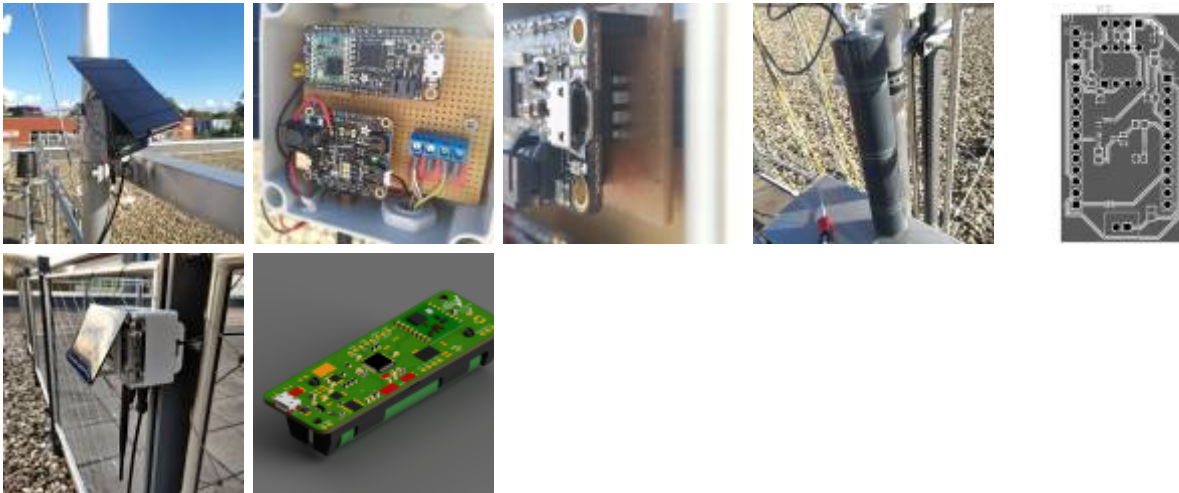

# Sceme Lora Node (Prototype v2)

The second prototype is more sophisticated and implements things that work in a more compact and also cleaner way. It is still based on the RFM95 HopeRF Module on 868 Mhz. It's using a 18650 LiPo battery and also includes a Solar Charger, so a Solar Cell can be hooked up.

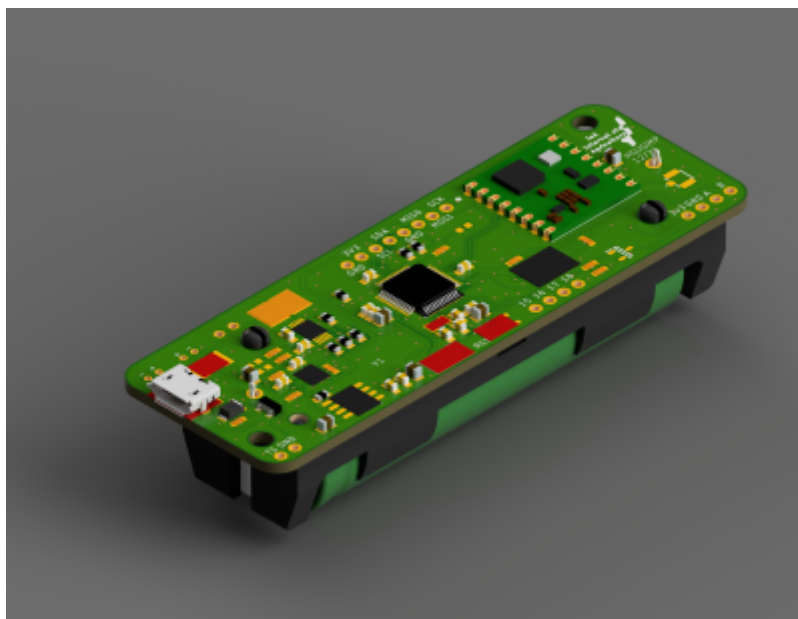

From:  
<https://student-wiki.eolab.de/> - **HSRW EOLab Students Wiki**

Permanent link:  
[https://student-wiki.eolab.de/doku.php?id=eolab:sceme\\_node:start&rev=1644397417](https://student-wiki.eolab.de/doku.php?id=eolab:sceme_node:start&rev=1644397417)

Last update: **2023/01/05 14:38**

