

Home Assistant Installation

Raspberry Pi Setup

1. Install Raspberry Pi imager <https://www.raspberrypi.com/software/>.

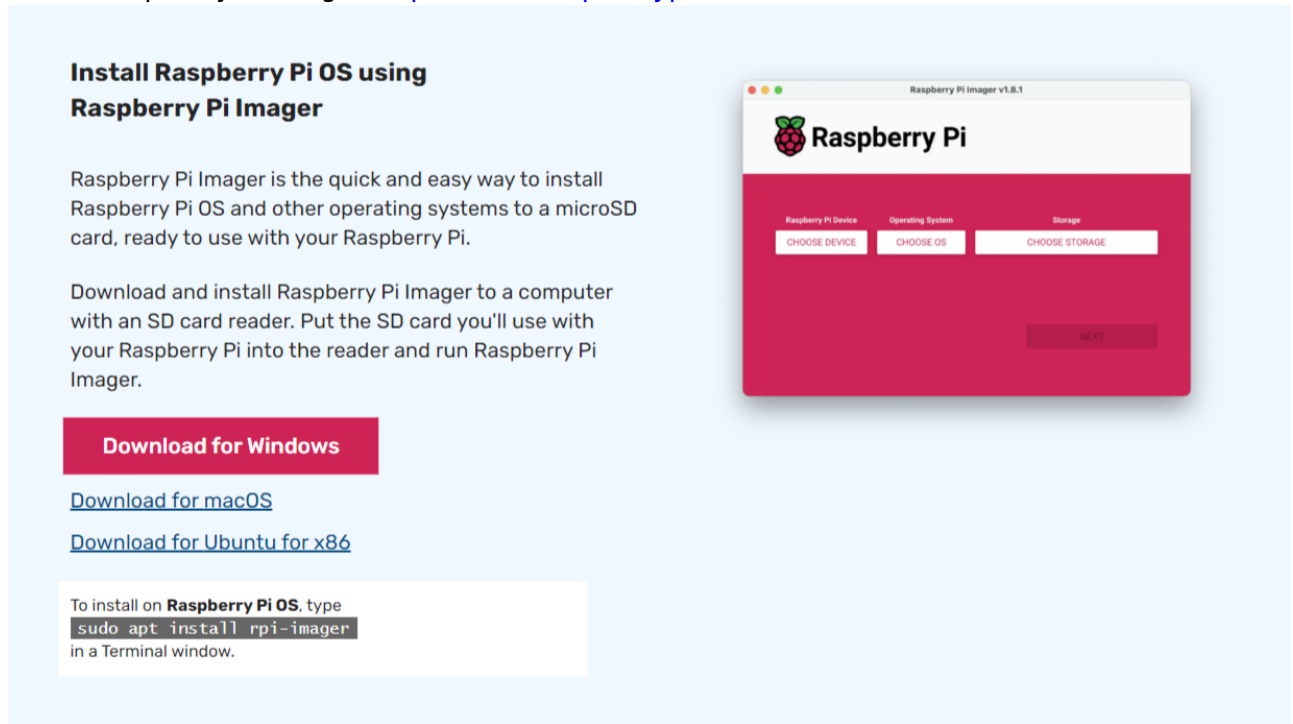


Fig. 1: Pick the operating system you are using

2. Insert the Micro SD card to the SD card reader.
3. Run the application.
4. Choose Device (Raspberry Pi 4 in this case).
5. Choose Operating System ("Other specific-purpose OS" → "Home assistants and home automation" → "Home Assistant" → "Home Assistant OS 12.x").
6. Choose Storage.

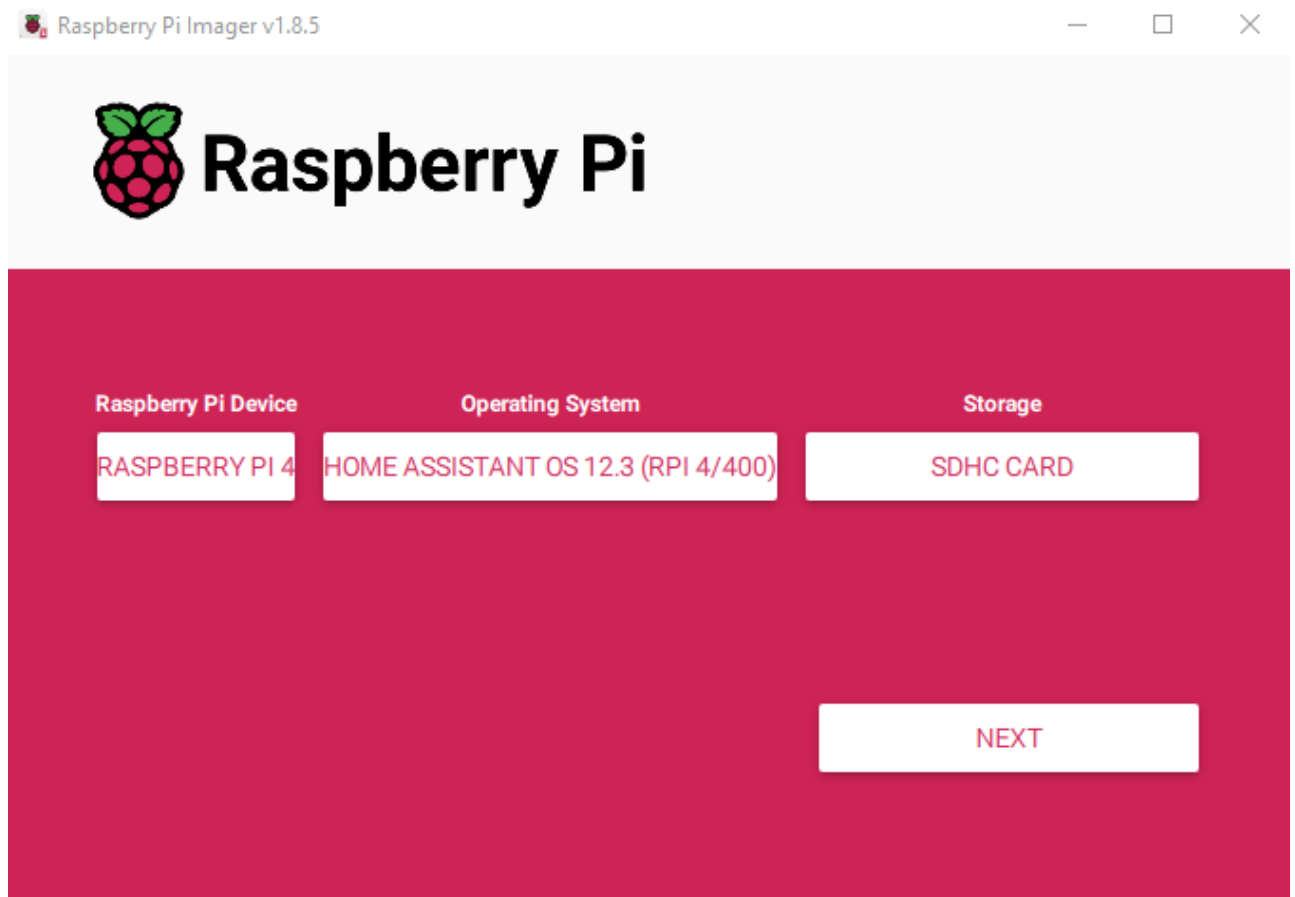


Fig. 2: Home Assistant Installation, In this case, Raspberry Pi 4

7. Click "Next" → "Yes". (Ignore Microsoft Error messages).
8. Remove the Micro SD card.
9. Insert the Micro SD card into the Raspberry Pi's Micro SD card slot.
10. Connect Raspberry Pi to power via the USB-C (or Micro-USB depending on the model) port.
11. Connect the Raspberry Pi to your network via the ethernet port on the Pi, make sure your computer is connected to the same network as well.
12. Home Assistant Installation happens automatically if the Micro SD card is inserted and the Raspberry Pi is powered on. This might take a few minutes. If you want to monitor the installation, connect the Raspberry Pi through its mini-HDMI port to a display.
13. Open a web explorer, navigate to <http://homeassistant.local:8123/> and hit enter.
14. Wait for the setup to finish and click on "Create My Smart Home".
15. Create a user using your preferred credentials.

HACS Installation

Home Assistant Community Store (HACS) is a third-party download manager for Home Assistant which contains various custom integrations. We need to install LocalTuya integration through HACS to locally control the pet feeder.

1. Go to your user profile and enable "Advanced mode".

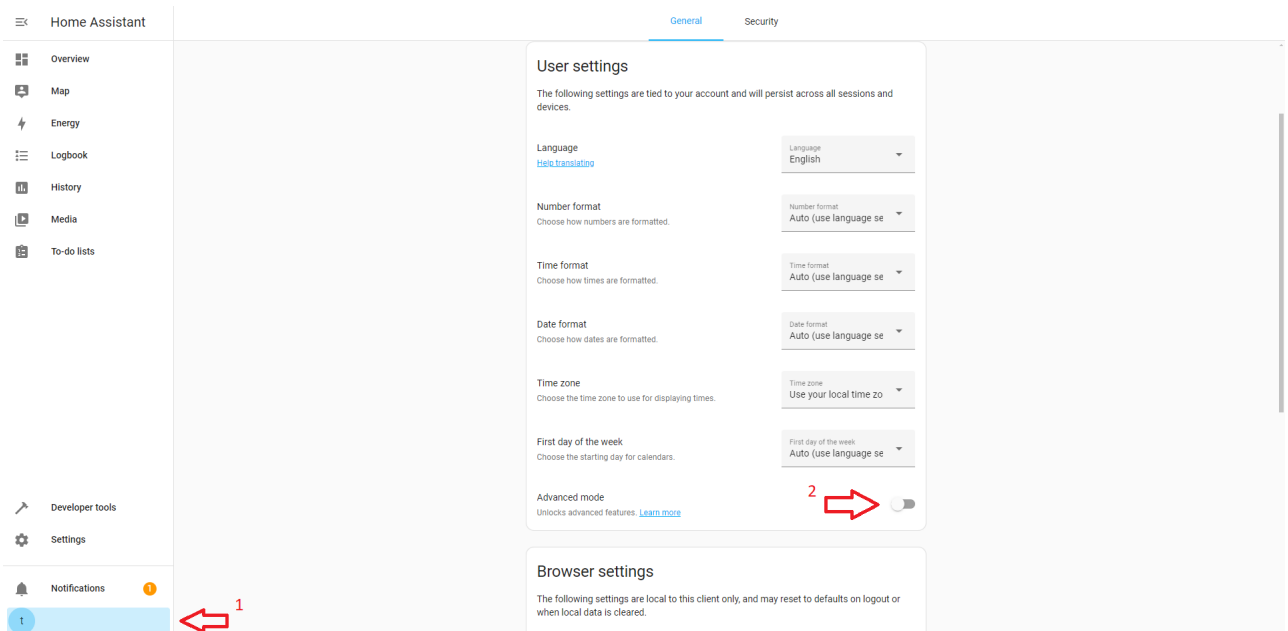


Fig. 3: User profile is found on the bottom right.

2. Go “Settings” → “Add-ons” → “Add-on store” → search “SSH” → Install “Terminal & SSH”.
3. After the installation is complete, enable “Show in sidebar”

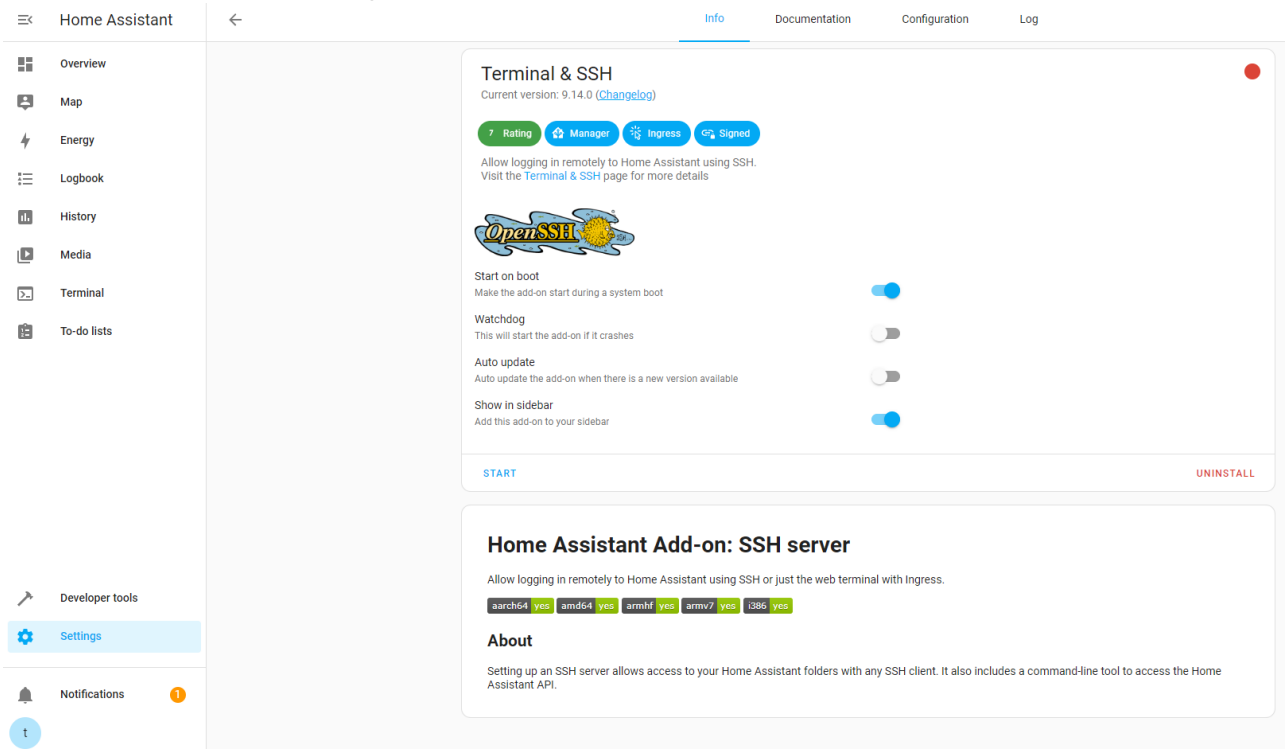


Fig. 4: SSH Add-on options after installation

4. Navigate to “Terminal” on the sidebar, if it appears not to be running or if you are receiving error codes, refresh the instance.
5. Copy and paste (CTRL+SHIFT+V to paste) the following command to the terminal and hit Enter. This will initiate the installation of HACS.

```
wget -O - https://get.hacs.xyz | bash -
```

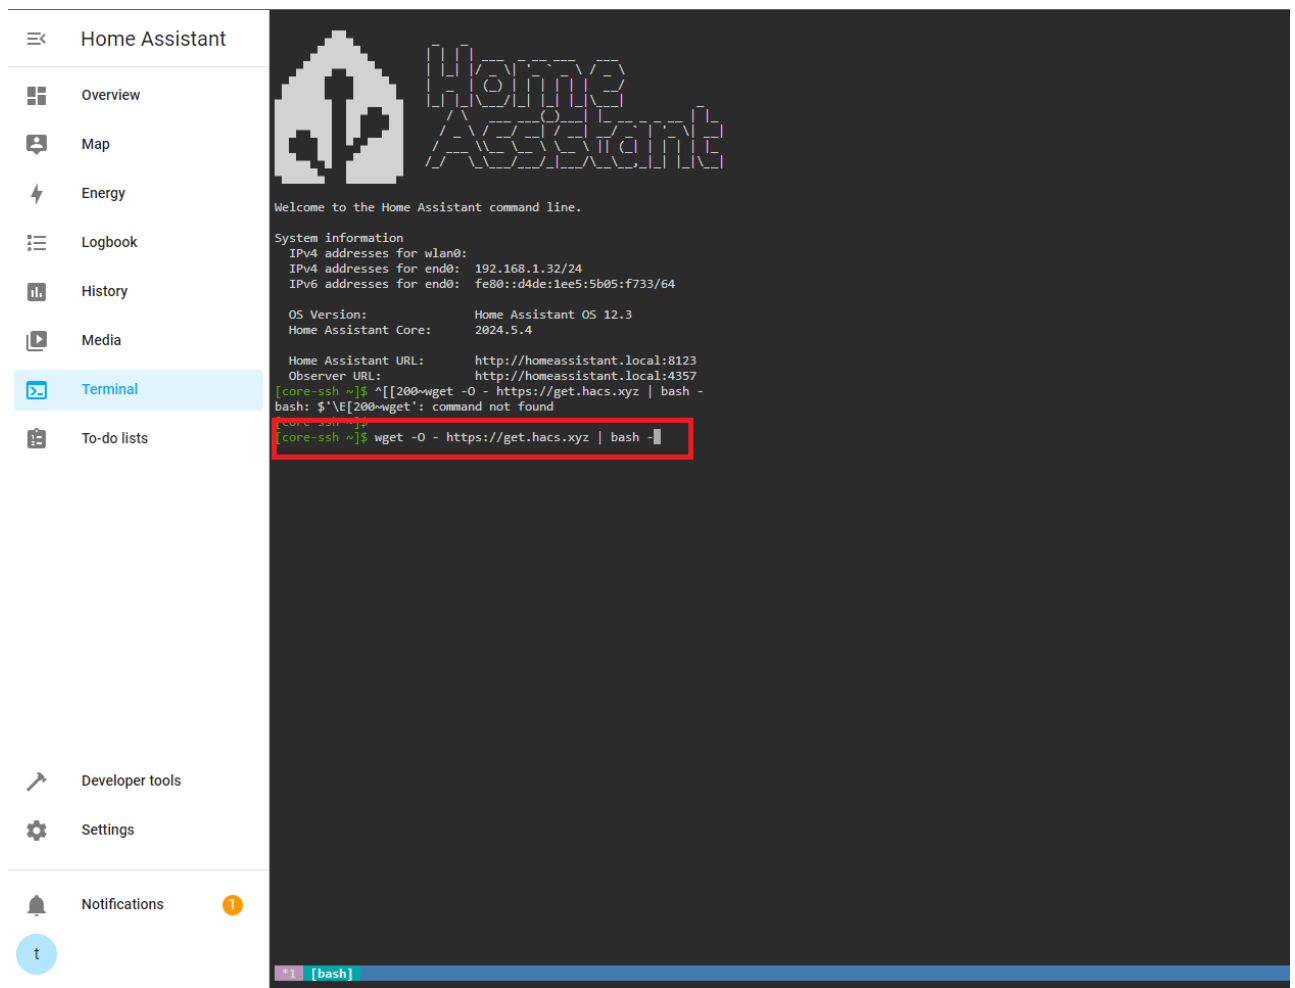


Fig. 5: HA SSH

6. After the installation is completed, restart the home assistant ("Settings" → three dots on the top right → "Restart Home Assistant" → "Restart Home Assistant").
7. Home Assistant should automatically restart, if the browser crashes, refresh the browser page to access Home Assistant again.
8. Navigate to "Settings" → "Devices & Services" → Click "Add Integration" on the bottom right corner.
9. Type "HACS" on the search bar, click on the result.


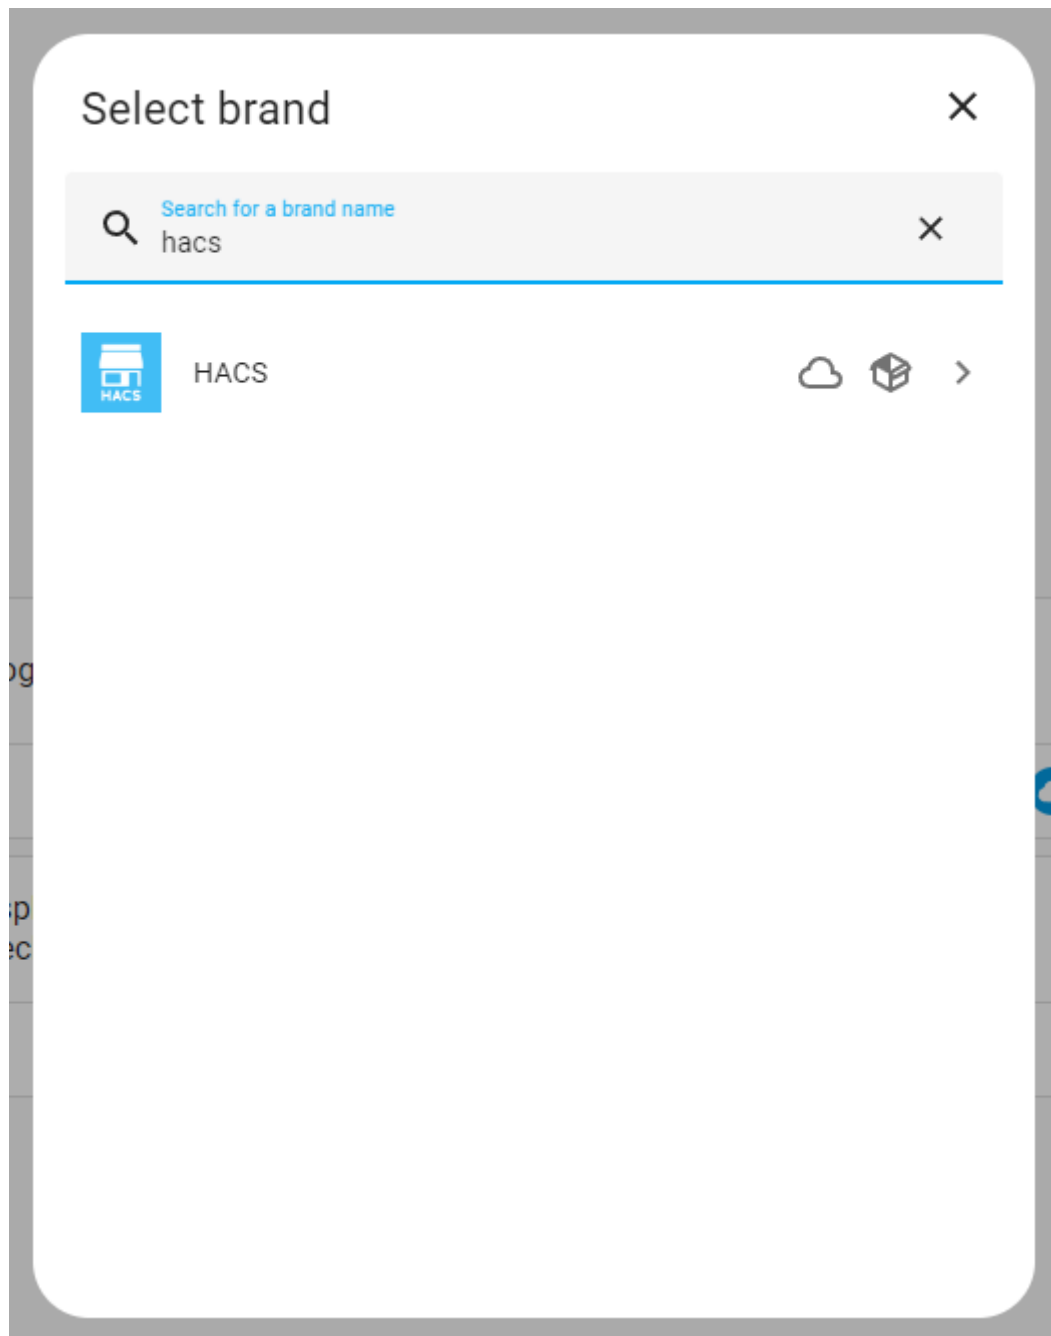


Fig. 6

10. Check all but the last checkbox and submit.

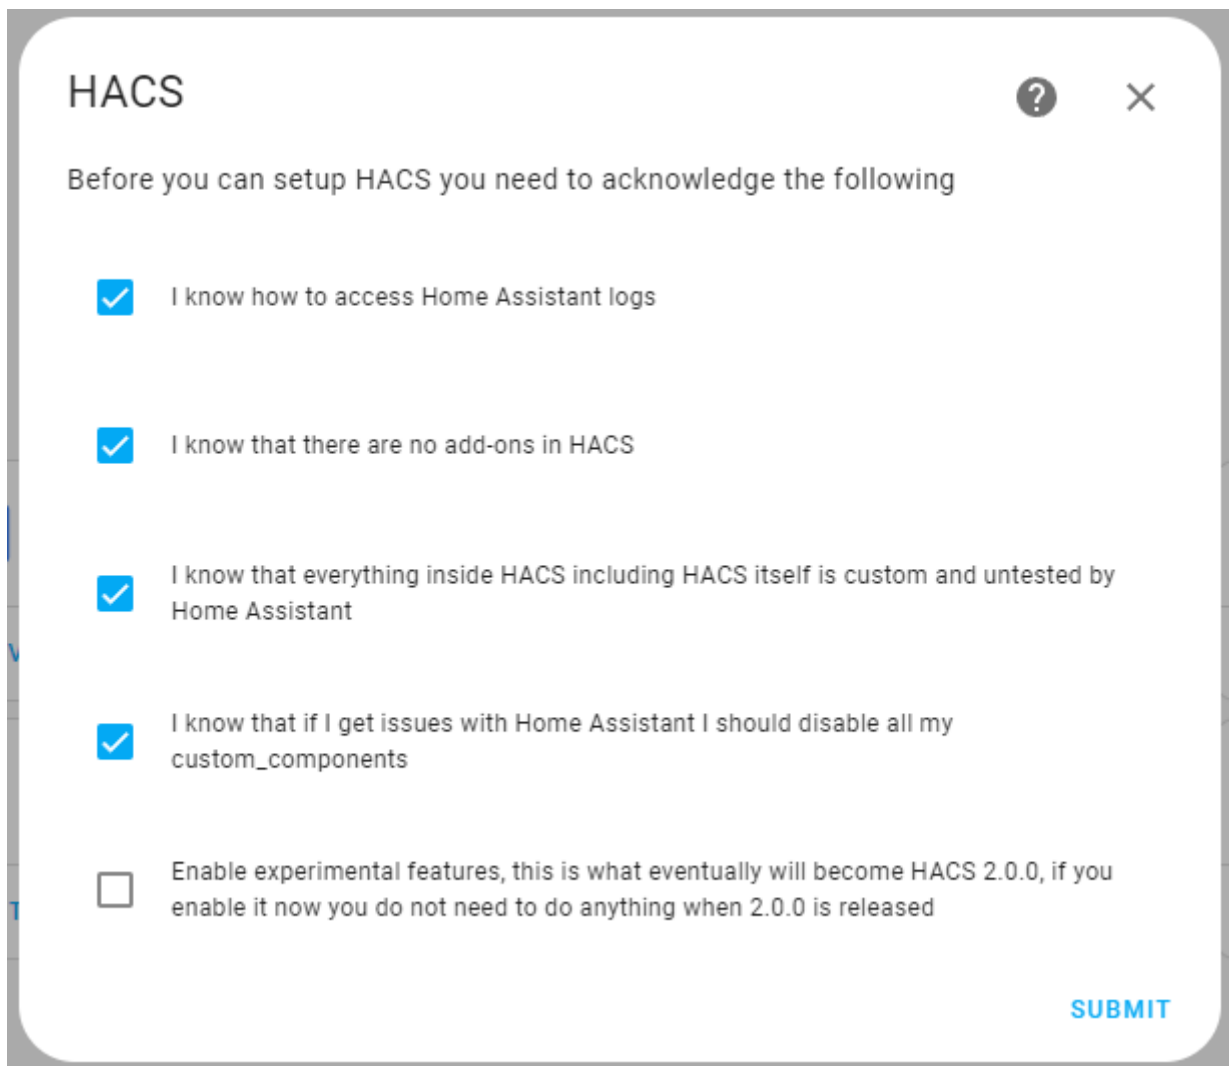

A dialog box titled "HACS" with a question mark icon and a close button. The text inside says "Before you can setup HACS you need to acknowledge the following". There are five checkboxes, four of which are checked. The fifth checkbox is unchecked and labeled "Enable experimental features, this is what eventually will become HACS 2.0.0, if you enable it now you do not need to do anything when 2.0.0 is released". A blue "SUBMIT" button is at the bottom right.

HACS ? X


Before you can setup HACS you need to acknowledge the following

- ☒ I know how to access Home Assistant logs
- ☒ I know that there are no add-ons in HACS
- ☒ I know that everything inside HACS including HACS itself is custom and untested by Home Assistant
- ☒ I know that if I get issues with Home Assistant I should disable all my custom_components
- ☐ Enable experimental features, this is what eventually will become HACS 2.0.0, if you enable it now you do not need to do anything when 2.0.0 is released

SUBMIT


Fig. 7

11. Create a github account if you don't have one.
12. HACS will ask you to activate device through your github account. Follow the instructions provided and link HACS with your github account.

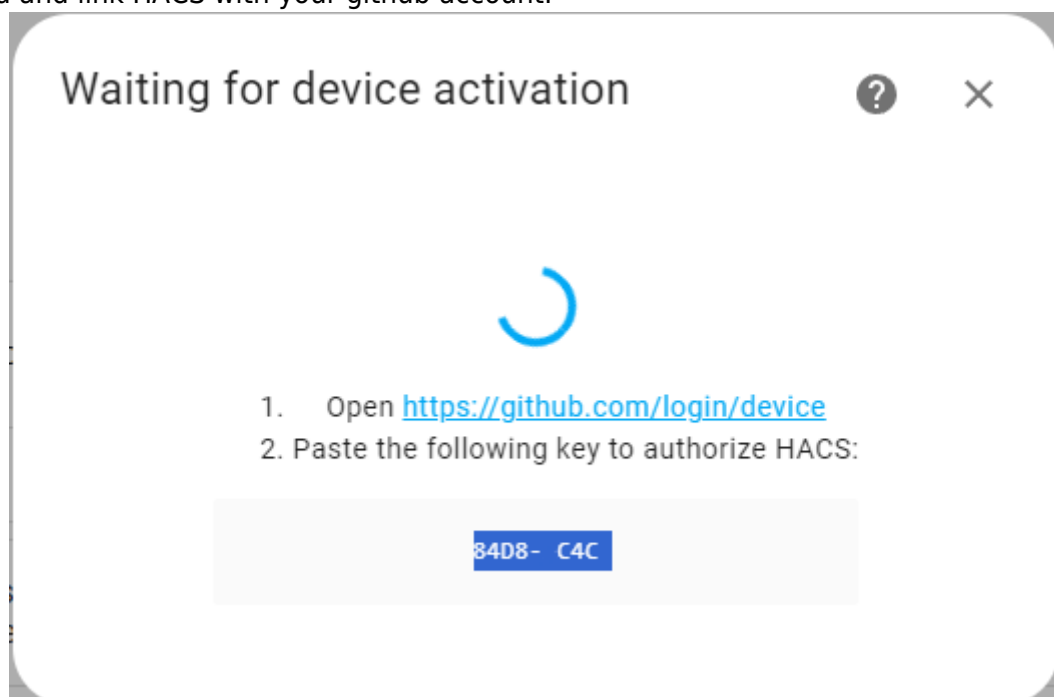

A dialog box titled "Waiting for device activation" with a question mark icon and a close button. It features a large blue circular loading spinner. Below the spinner, there are two numbered instructions: "1. Open https://github.com/login/device" and "2. Paste the following key to authorize HACS:". A blue button with the text "84D8- C4C" is at the bottom.

Waiting for device activation ? X



1. Open <https://github.com/login/device>
2. Paste the following key to authorize HACS:

84D8- C4C

Fig. 8: Copy highlighted code and click on the github link

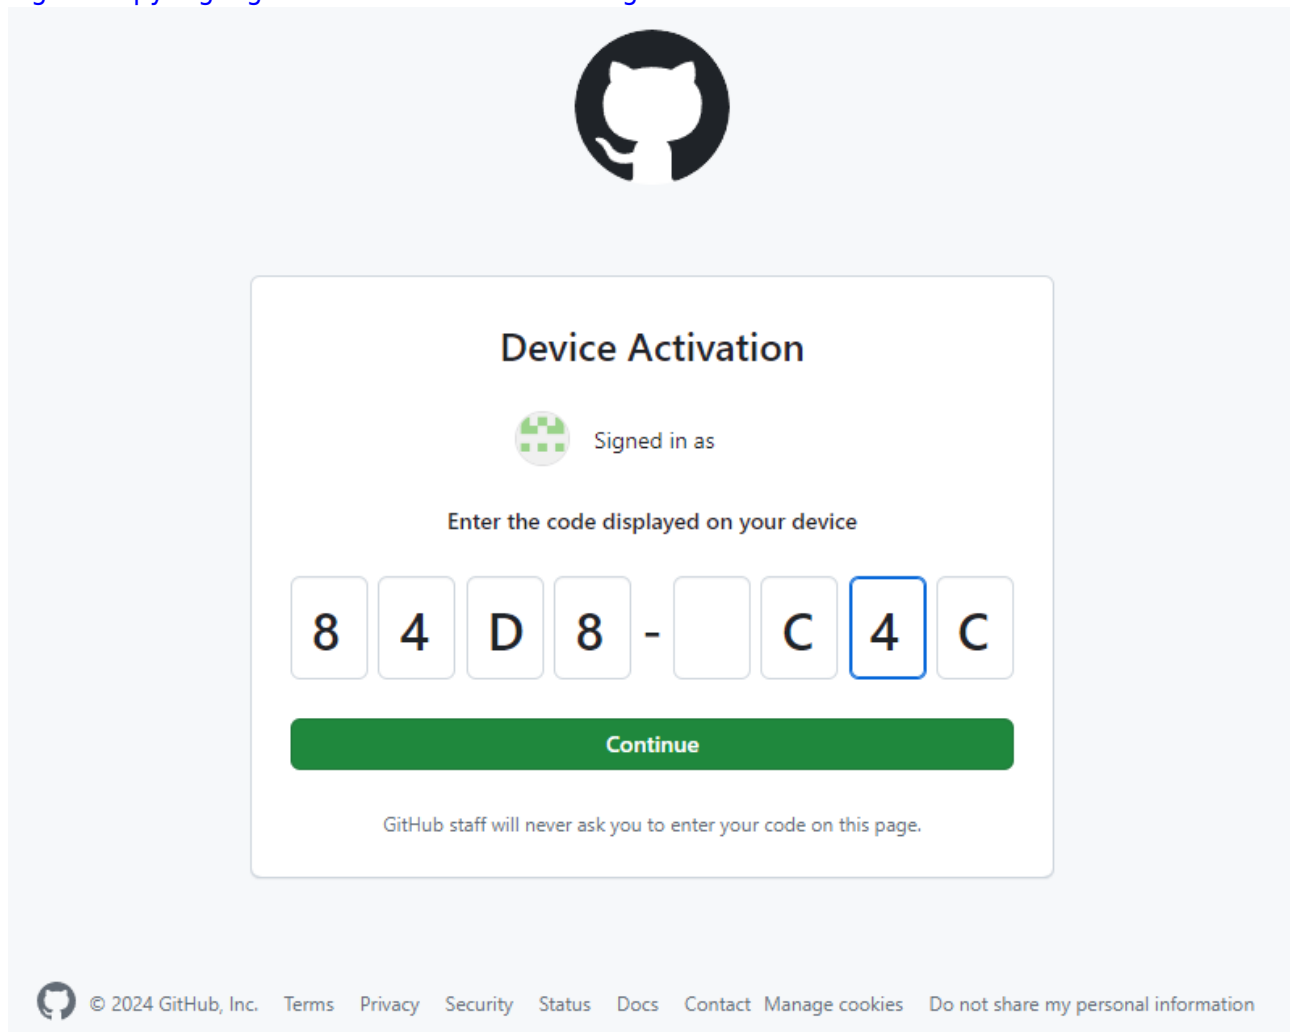


Fig. 9: Paste the code here.

13. Click on “Authorize” and exit github.
14. If everything is set correctly you should have installed HACS on your Home Assistant. Do not pick an area on the pop-up and click on “finish”.
15. Now HACS should show up on the sidebar of Home Assistant UI.

LocalTuya integration Installation

LocalTuya integration is what we need to control the pet feeder locally.

1. On the HACS tab, click on “Integrations”.

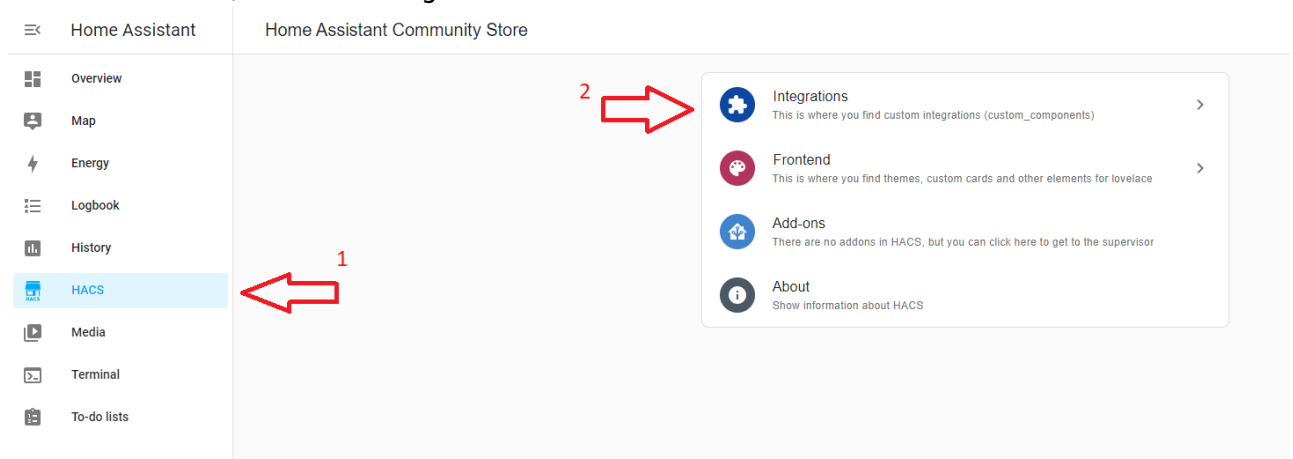


Fig. 10

2. Click on “Explore & Download Repositories” on the bottom right, on the pop-up search, type “LocalTuya”. Click on the result.

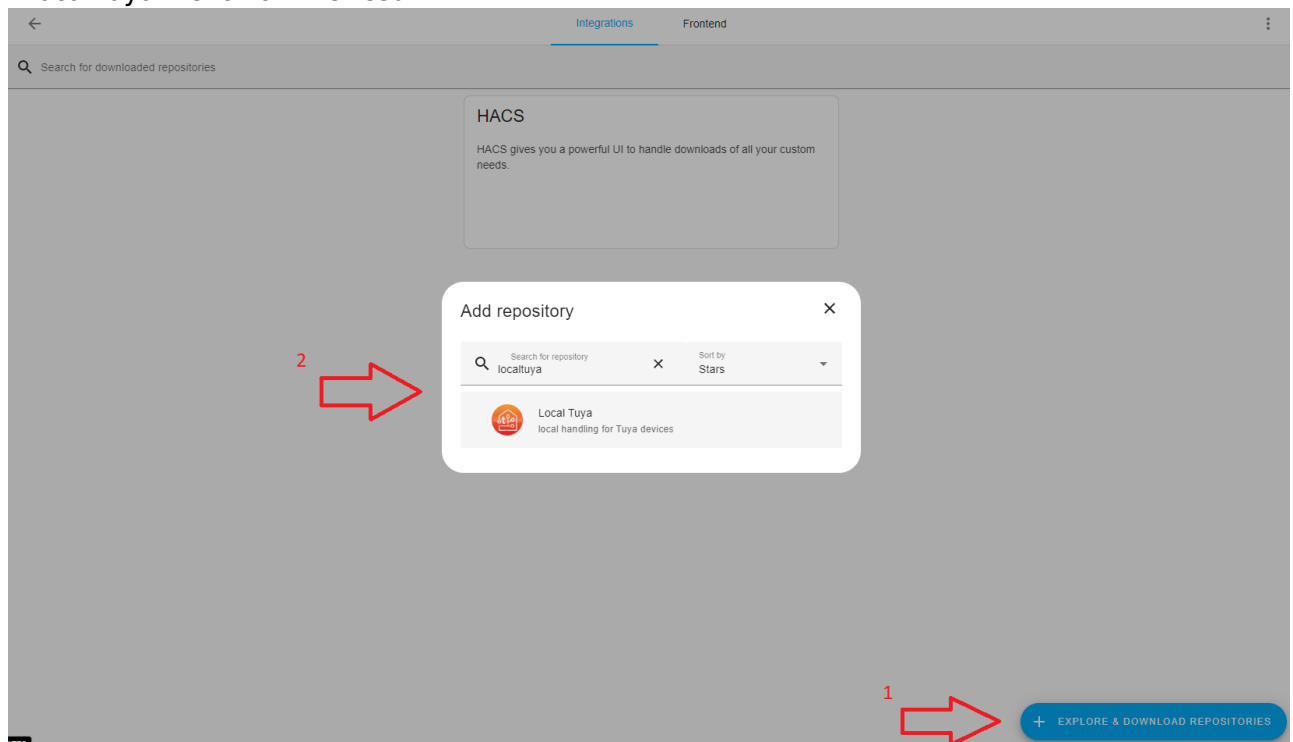


Fig. 11

3. Click on “Download” on the bottom right. Click on “Download” again on the pop-up.

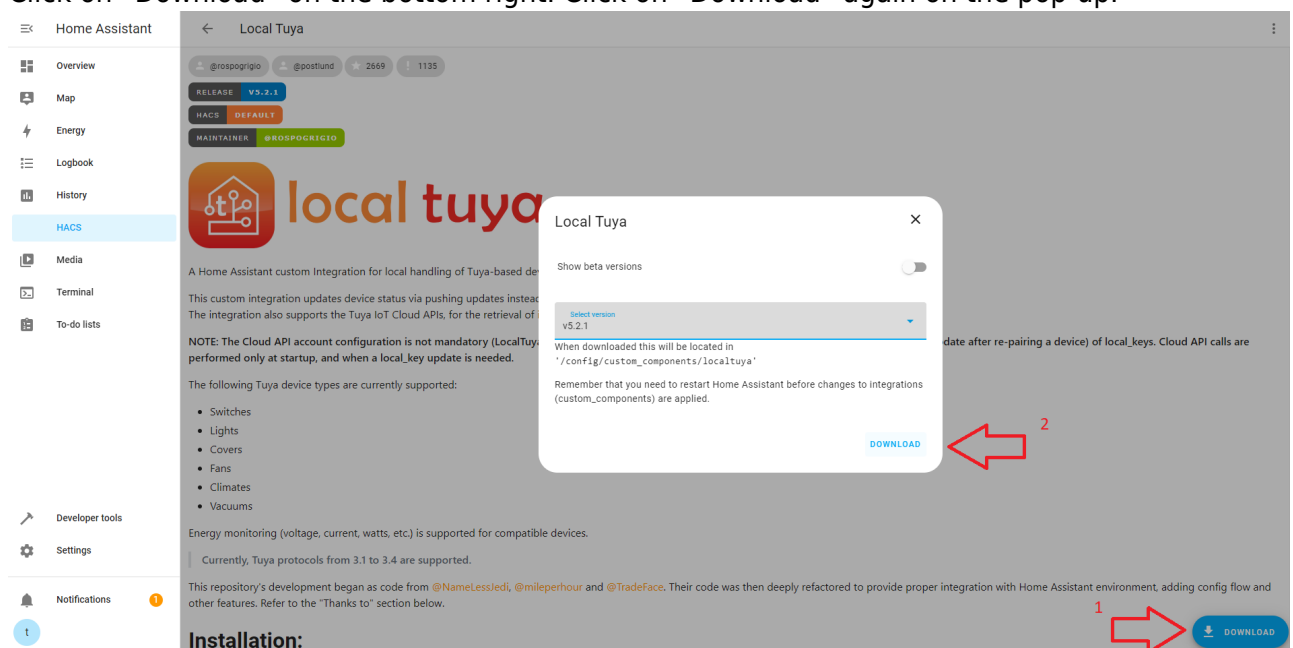


Fig. 12

Adding Pet Feeder to Home Assistant

1. Download the “Tuya Smart” app to your smartphone.
2. Press both buttons on the pet feeder at the same time.
3. Run the “Tuya Smart” app, press “Add Device”, the Pet feeder should appear automatically, turn on your Bluetooth if it doesn't. Insert the wireless credentials and press login. **Make sure**

the pet feeder and the Home Assistant are in the same network.

4. Navigate to [Tuya IoT development platform](#) and create an account.

Create Your Tuya Account

*** Email**

*** Verification Code**

Resend After 14 s

*** Password**

Confirm Password

Organization Name

*** Country/Region**

Germany

☒ Agree to [Terms of Use](#), [Legal Statement](#), [Privacy Policy](#)

☒ I declare that I have reached legal age of majority and have the capacity to consent to the above documents.

Next

Fig. 13

5. Once the account is created, navigate to the [developer platform](#) on the top right corner of the page you were redirected to.
6. Skip the tutorials, hover the cursor over “Cloud” on the sidebar and click on “Development”.

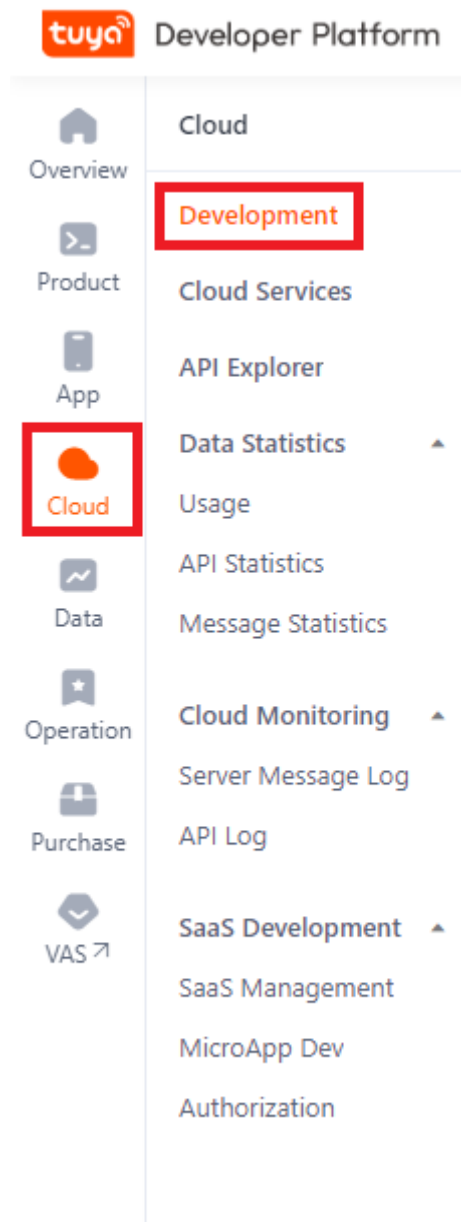


Fig. 14

7. Click on “Create Cloud Project” on the Development page. Fill in the project details. Pick “Custom” Development method and “Central European Data Center”, pick the rest as you see fit.

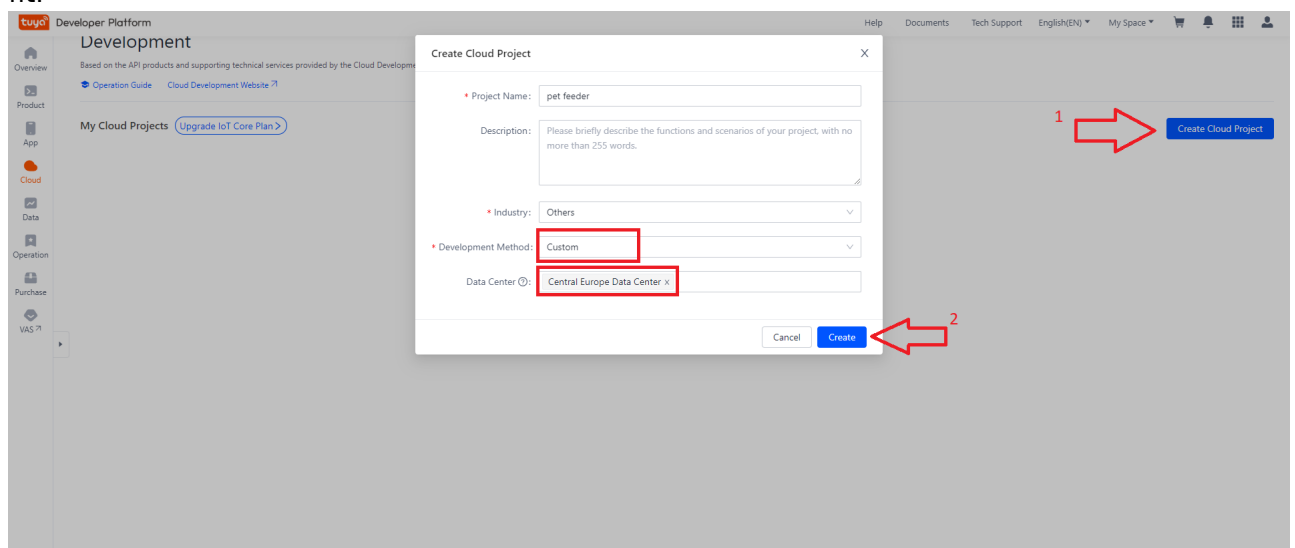


Fig. 15

8. In the next step, add “Smart Home Basic Service” and “[Deprecate]Device Log Query” to the selected API services. Click on “Authorize”.

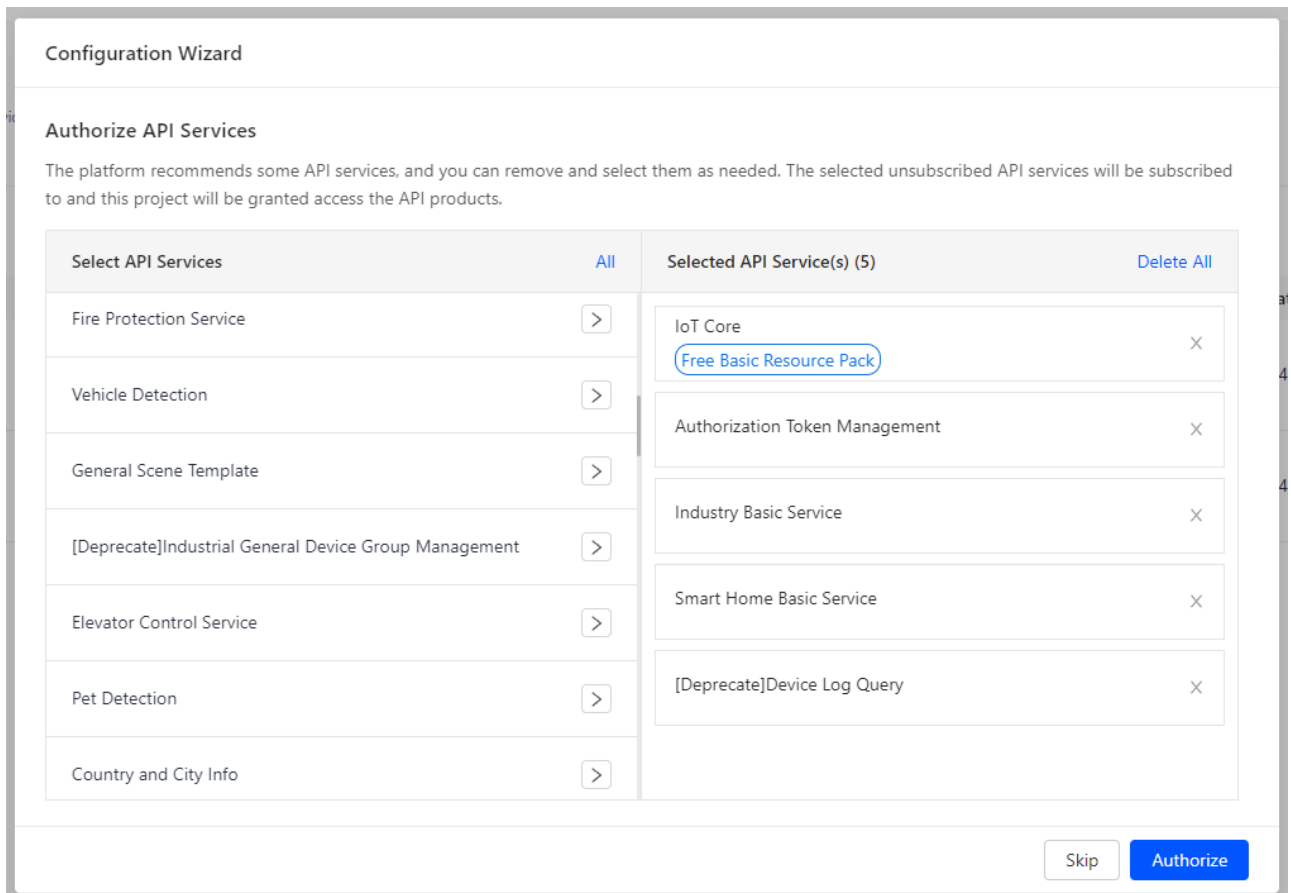


Fig. 16

9. Now that the project is created, let's add the pet feeder to the project. Navigate to “Devices” → “Link Tuya App Account” → “Add App Account”.

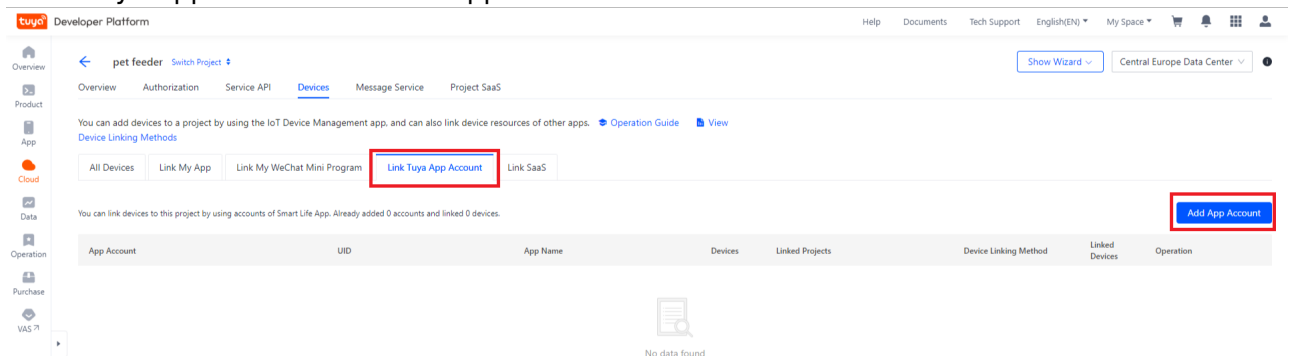


Fig. 17

10. A QR code will appear, open the “Tuya Smart” app on your phone, press on “Me” on the bottom right and then press on the scan icon on the top right, scan the QR code.
11. After the QR code is scanned, pick “Automatic Device Linking Method” and click on OK.

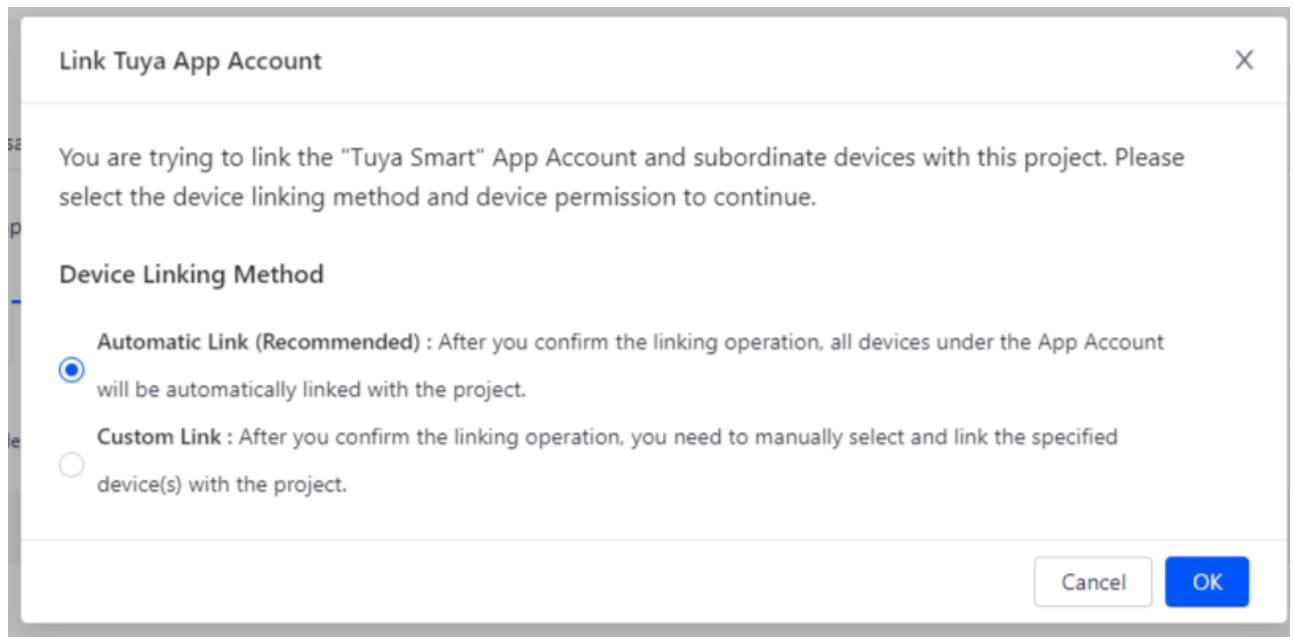


Fig. 18

12. Once the linking is complete, you should be able to see your account details on the “Link Tuya App Account” tab. **Make note of the “UID”**, we will use this later. Click on “Manage Devices”.

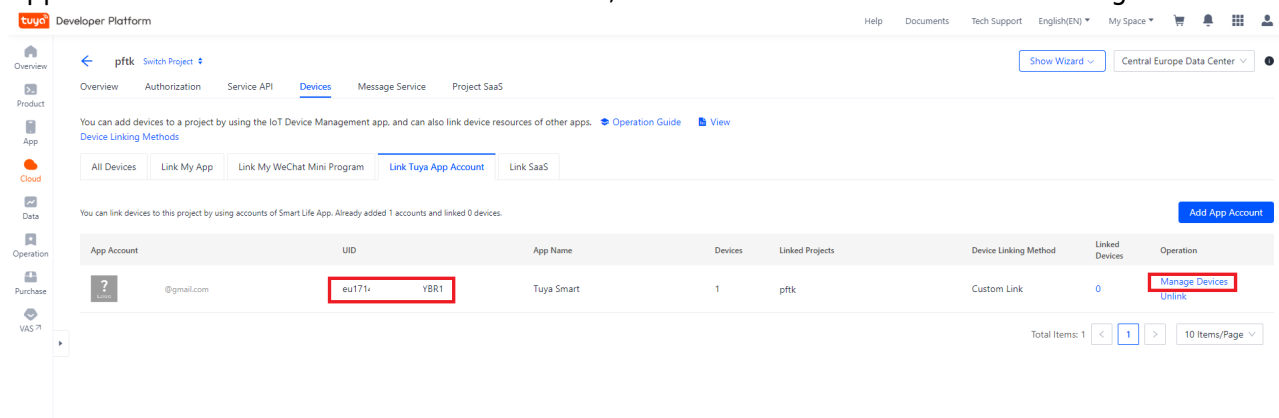


Fig. 19

13. If the Pet Feeder is shown as unlinked, check the checkbox next to the pet feeder and hit “Link Device”.

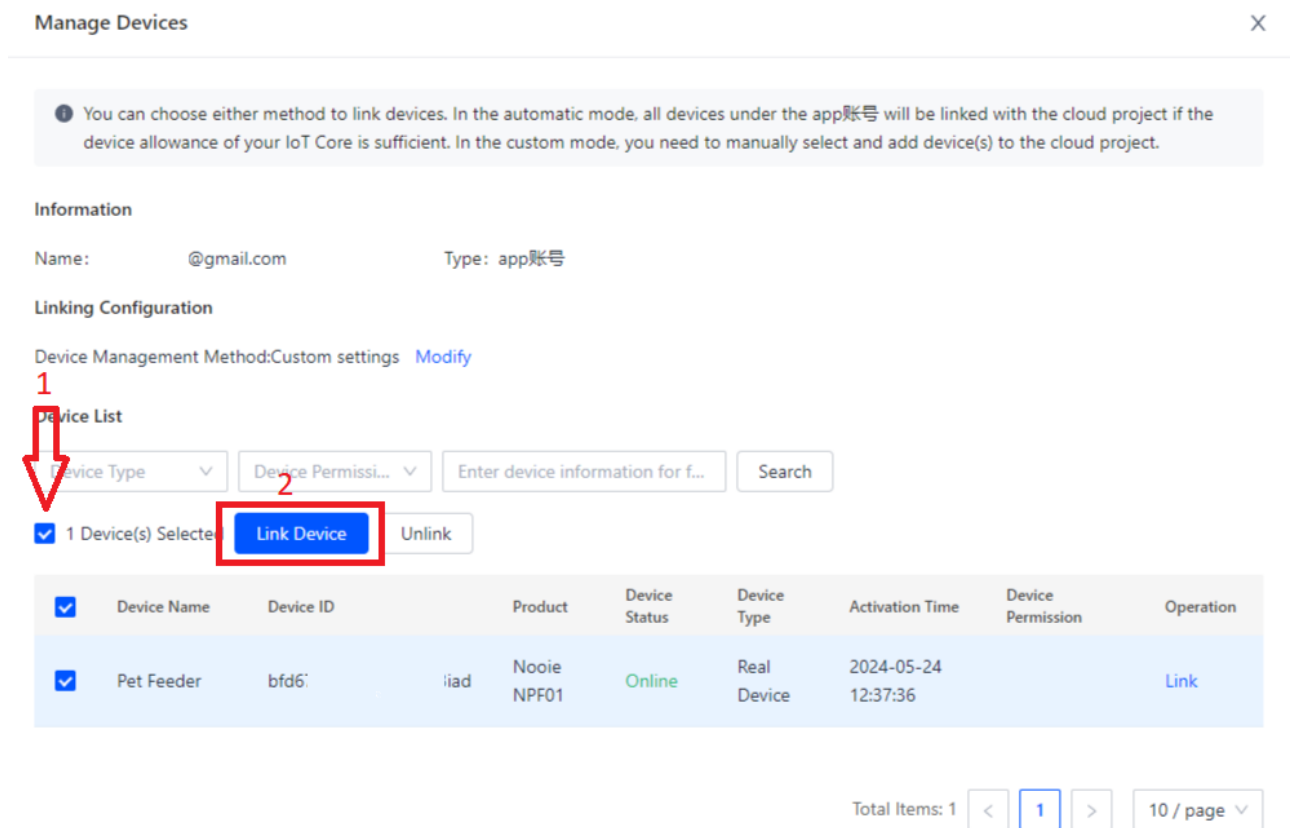


Fig. 20

14. Confirm the pet feeder exists on the “All Devices” tab, do not close this webpage.

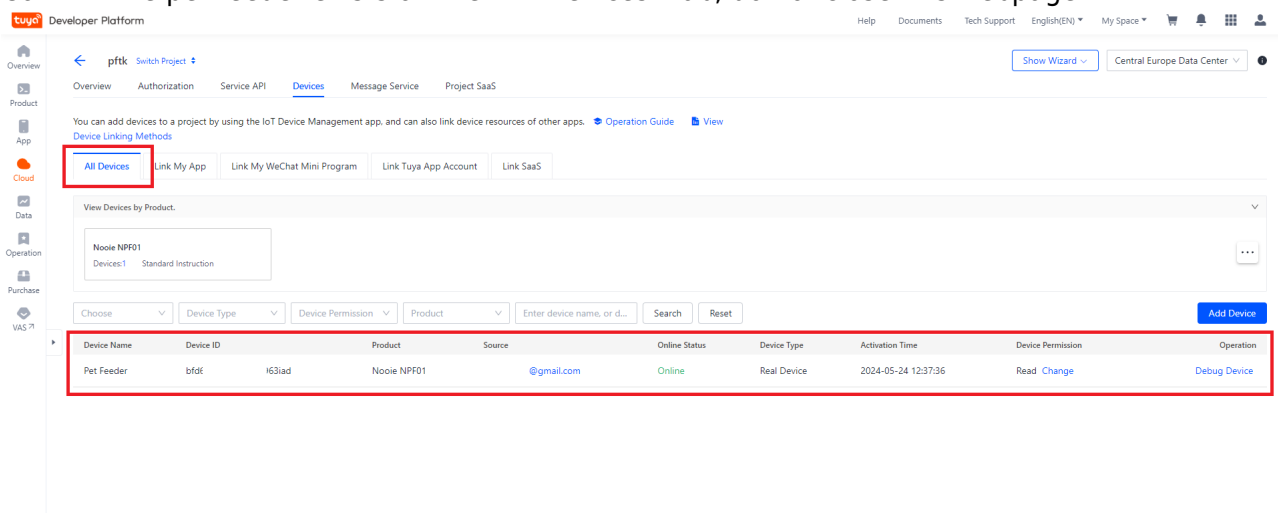


Fig. 21

15. Navigate back to the [Home Assistant UI](#)

16. Go to “Settings” → “Devices & Services” → “Add Integration” on the bottom right corner, Search for “LocalTuya”. Click on “LocalTuya Integration”.


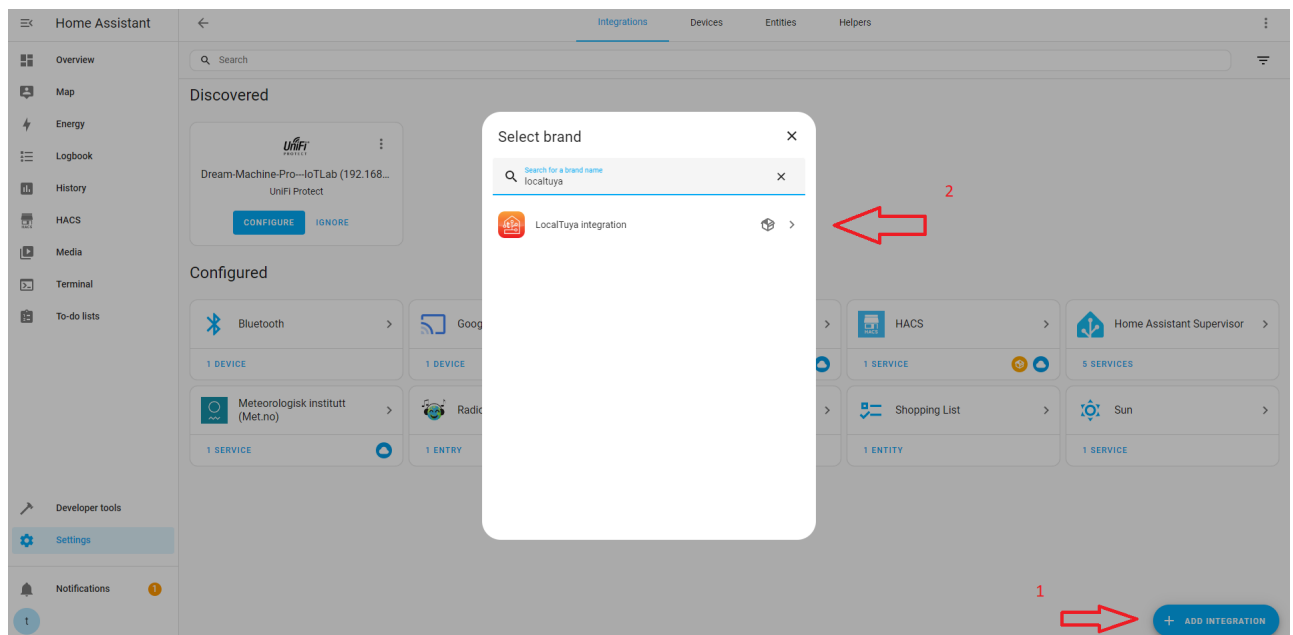


Fig. 22

17. Once LocalTuya is installed, Cloud API configuration pop up will appear. Make sure API server region is EU. For the rest of the credentials, we need to navigate back to [Tuya developer platform](#).

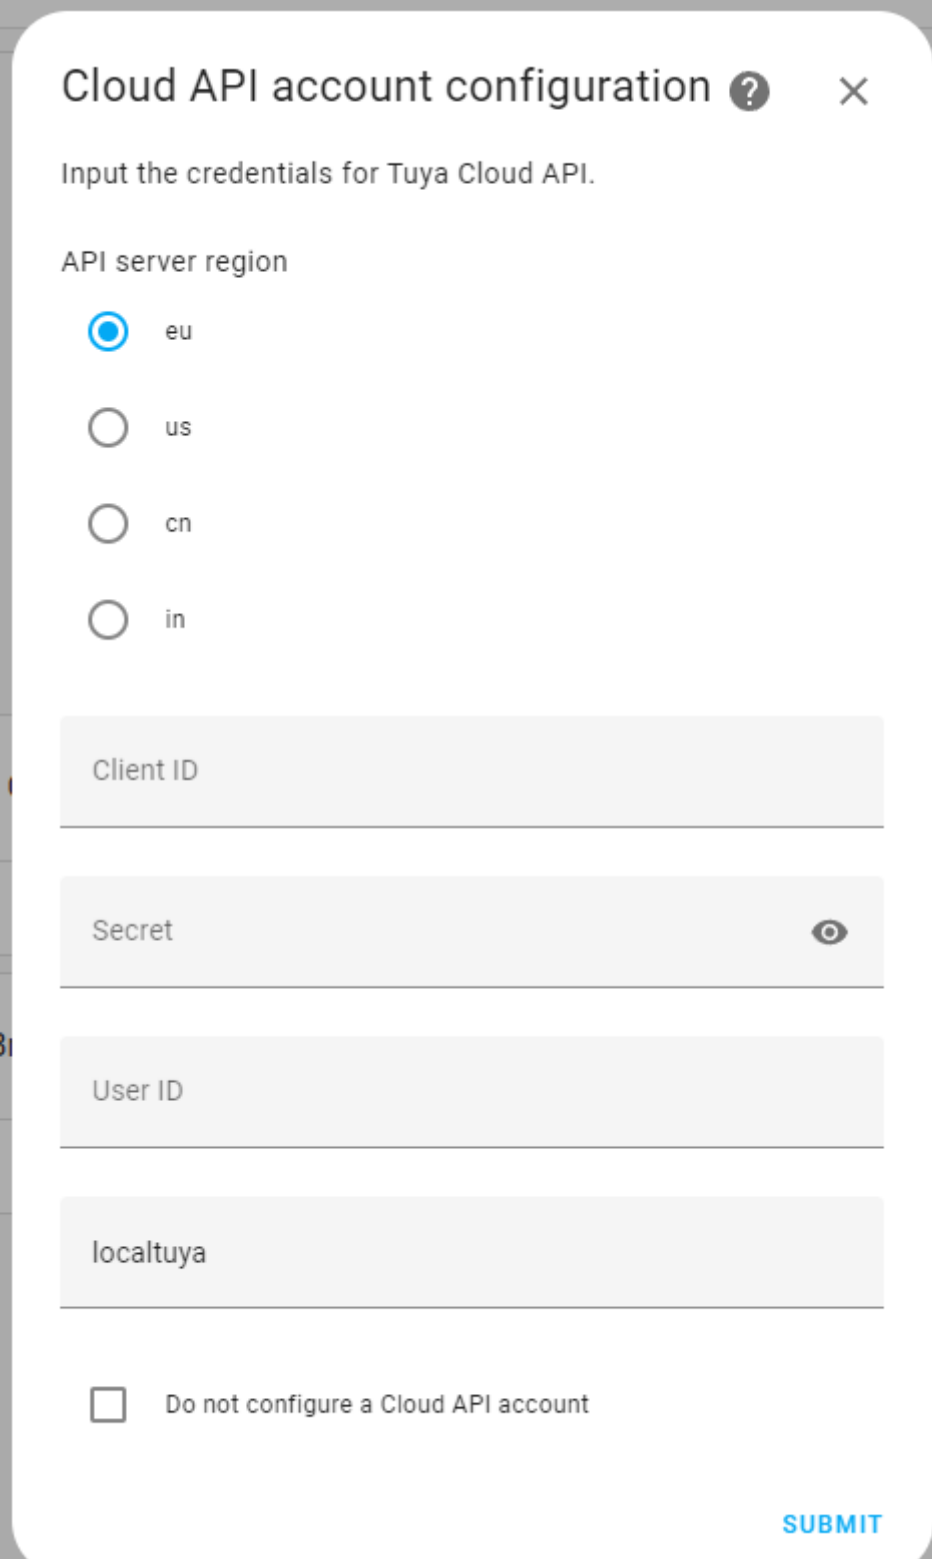

The image shows a 'Cloud API account configuration' dialog box. It has a title bar with a question mark icon and a close 'X' icon. Below the title, it says 'Input the credentials for Tuya Cloud API.' The 'API server region' section has four radio button options: 'eu' (selected), 'us', 'cn', and 'in'. Below this are four text input fields: 'Client ID', 'Secret' (with an eye icon for toggling visibility), 'User ID', and 'localtuya'. At the bottom left, there is a checkbox labeled 'Do not configure a Cloud API account'. At the bottom right, there is a blue 'SUBMIT' button.

Fig. 23

18. On the left sidebar, hover on “Cloud” → “Development” → “Open Project”. The “Client ID” and the “Secret” can be found under the “Overview” tab of the cloud project. (not the Overview on the sidebar, the one under our project name).

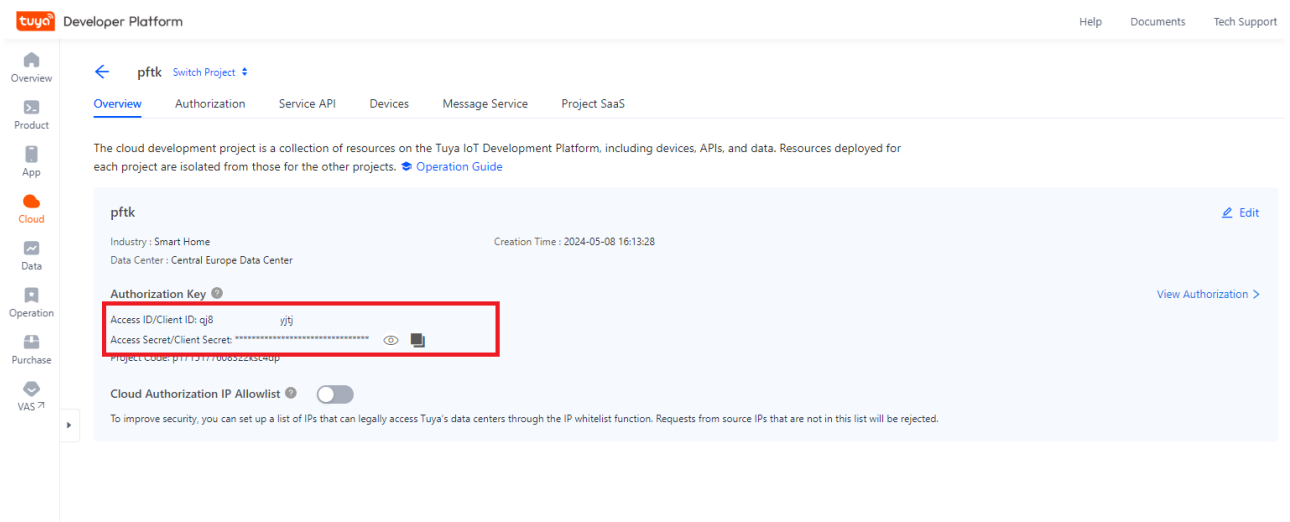


Fig. 24

19. Insert the credentials back to Home Assistant. Use the previously mentioned "UID" from "Link Tuya App Account" tab and click on "Submit".
20. LocalTuya Integration is now linked with your Tuya Development Account. We still need to configure the pet feeder for local use.
21. You will be redirected to LocalTuya integration page, if not, Navigate to "Settings" → "Devices & Integrations" → "LocalTuya".
22. Click on "Configure" on the same page → "Add a New Device" → "Pet Feeder" (which should be recognized automatically) and submit.


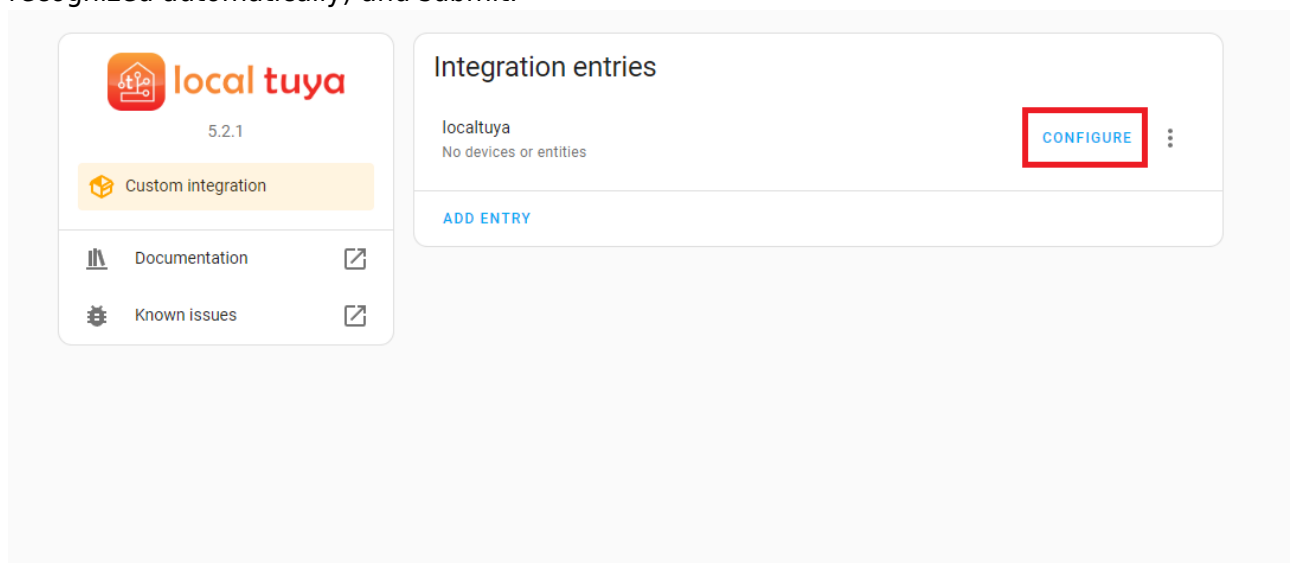


Fig. 25

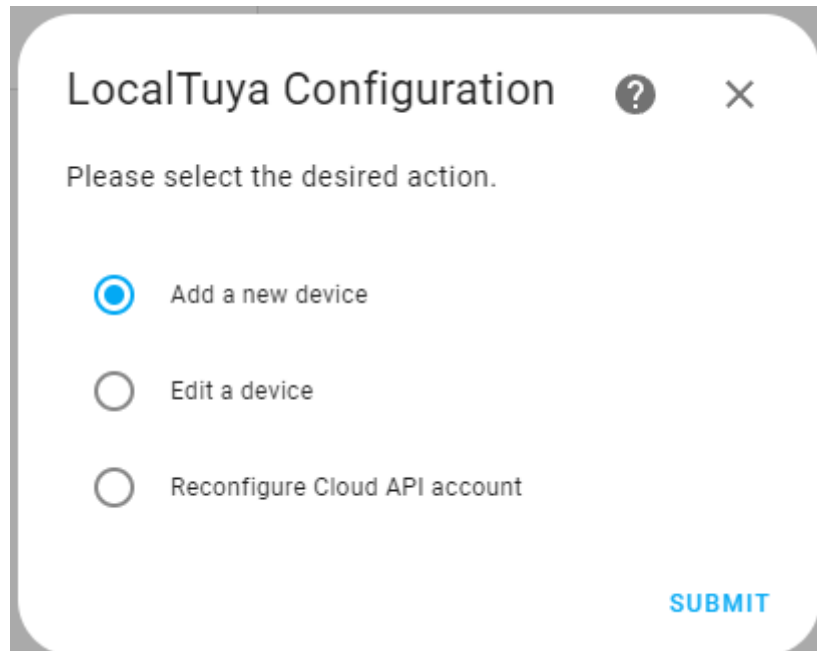


LocalTuya Configuration ? X

Please select the desired action.

- ☒ Add a new device
- ☐ Edit a device
- ☐ Reconfigure Cloud API account

SUBMIT

Fig. 26

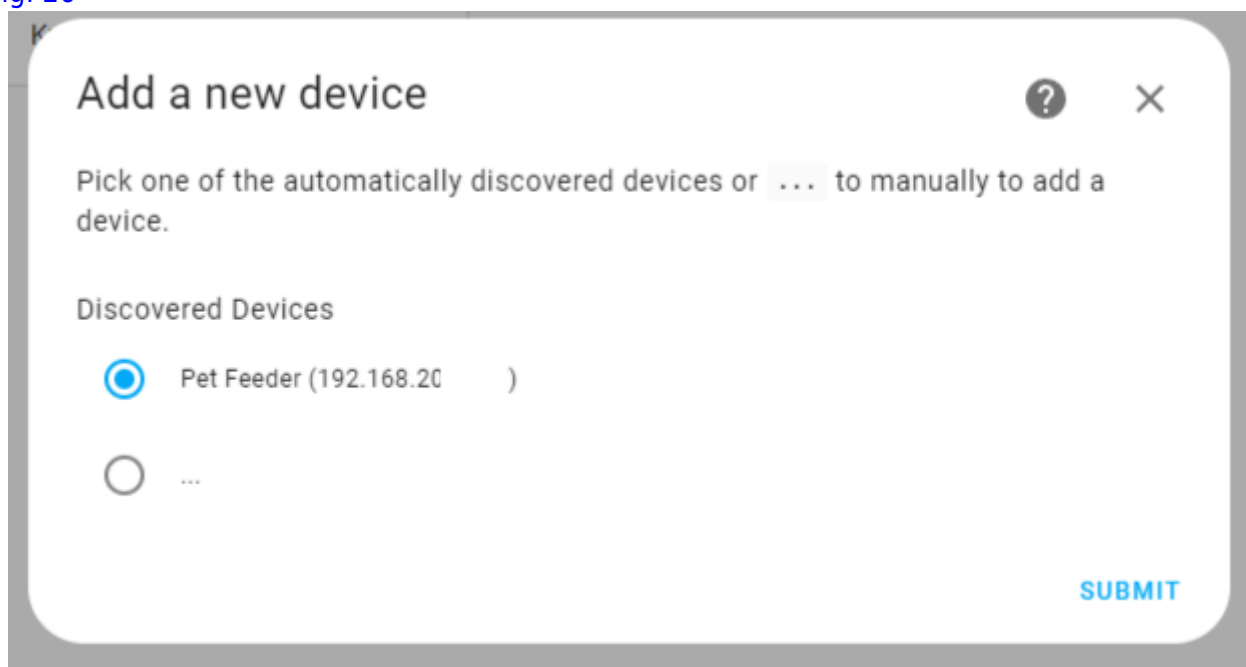

Add a new device ? X

Pick one of the automatically discovered devices or ... to manually to add a device.

Discovered Devices

- ☒ Pet Feeder (192.168.20)
- ☐ ...

SUBMIT

Fig. 27

Configure Tuya device

Fill in the device details.

Name*

Pet Feeder

Host*

192.168.2

Device ID*

b13iad

Local key*

_ZG(\n

Protocol Version

☐ 3.1

☐ 3.2

☒ 3.3

☐ 3.4

☐ Enable debugging for this device (debug must be enabled also in configuration.yaml)

Scan interval (seconds, only when not updating automatically)

Manual DPS to add (separated by commas ',') - used when detection is not wo...

DPS to add in RESET command (separated by commas ',') - used when devi...

Fig. 28

1. Skip to step 23 if the credentials of the Pet Feeder are configured automatically. If the Pet Feeder's configuration is **not set automatically**, navigate back to the Tuya Developer Platform, hover on the "Cloud" icon on the sidebar → "API Explorer".

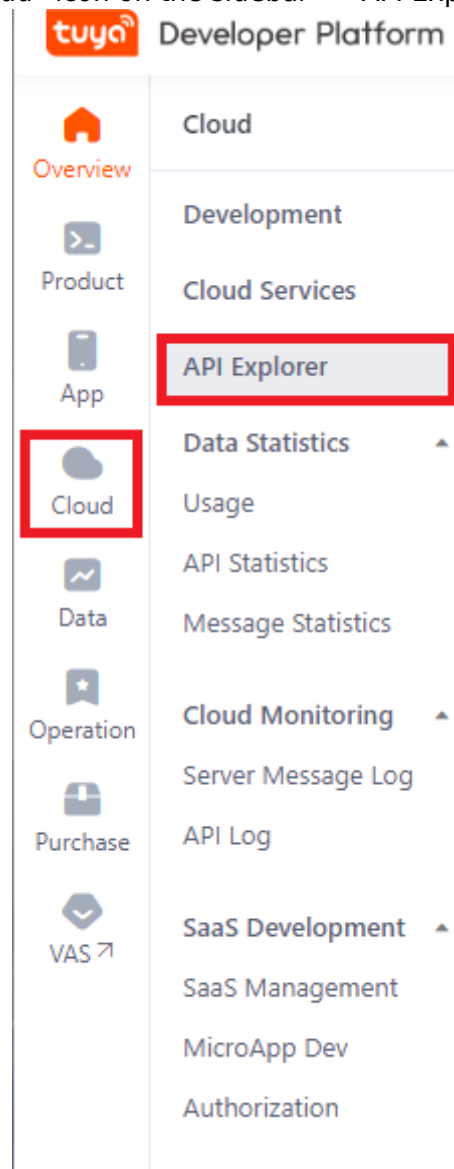


Fig. 29: Optional step, refer to step 22.a.

2. On the API explorer, Navigate to "Query Devices in Project" on "Device Management".
3. Type "1" to "page_size" and click on "Submit Request".
4. The response query gives us credentials of the device. We can find the local key and device id (called "id").

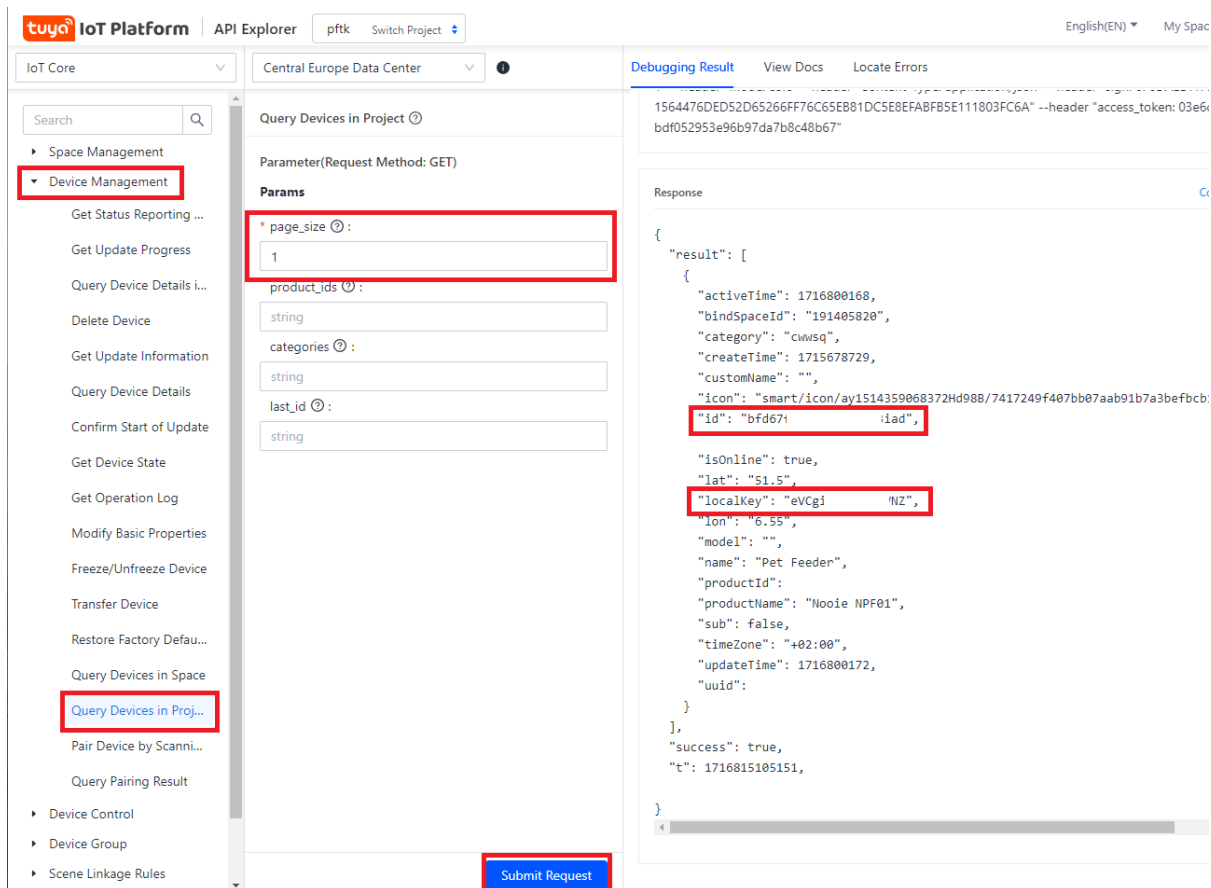


Fig. 30: Optional step, refer to step 22.a.

5. The Host address can be obtained via your router’s web interface.
23. After you submit, you will be met with the “Entity Type Selection” pop-up. The pet feeder has different functions such as dispensing food or turning the LED on the pet feeder on and off. Each of these functions has their own “Data Point ID” to communicate with the cloud. We need to intercept these Data Points and create separate entities to control the device via the Home Assistant.

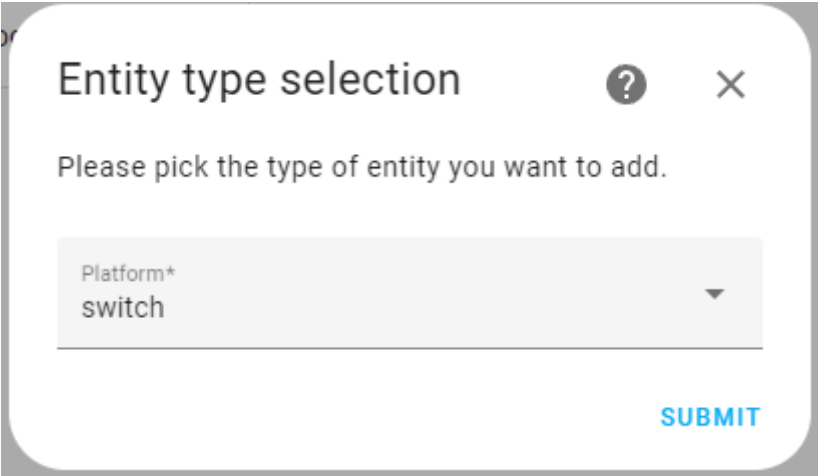


Fig. 31

24. Do not exit the Home Assistant instance and navigate back to Tuya Developer Platform. Open your project and navigate to “All Devices” tab under “Devices” and click on “Debug Device”.

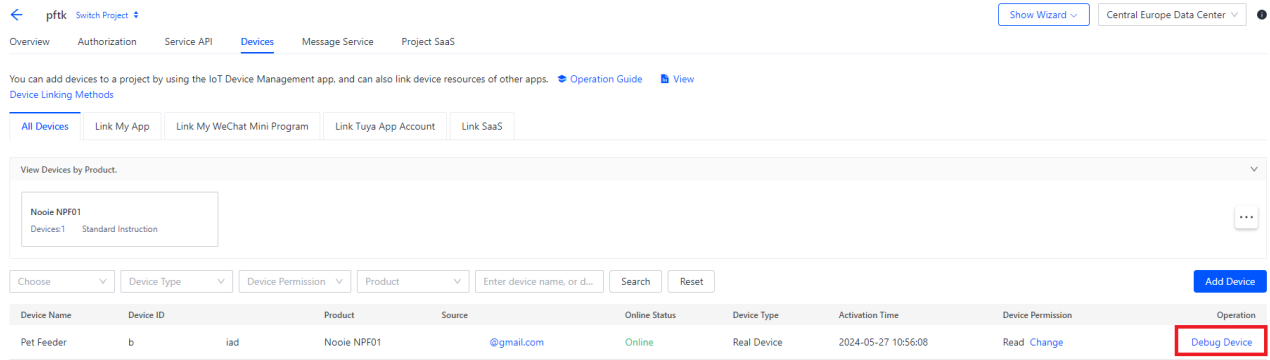


Fig. 32

25. On the device debugging page, under “Standard Instructions Set” are the functions of the device we can set new values for. Under “Standard Status Set” are the previously mentioned functions and the available sensors of the device.
26. To find out which Data Point is associated with which function of the device, navigate to “Device Logs” tab.

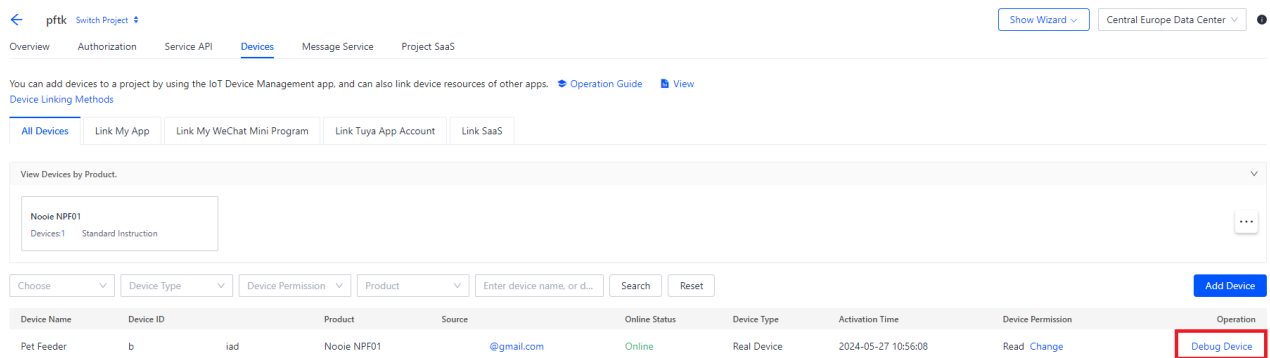


Fig. 33

27. Turn the developer console on of your browser (CTRL+SHIFT+I or F12 for Google Chrome). Navigate to “Network” tab on the developer console.
28. Notice the “Select DP ID” dropdown menu on the top left side of the page.
29. While the Developer console is on, click on the DP ID dropdown menu and select “Manual Feed”, click on “Search”.
30. After you click on “Search”, you should see the network tab of your developer console update with several different logs. “list” is the one we are looking for.

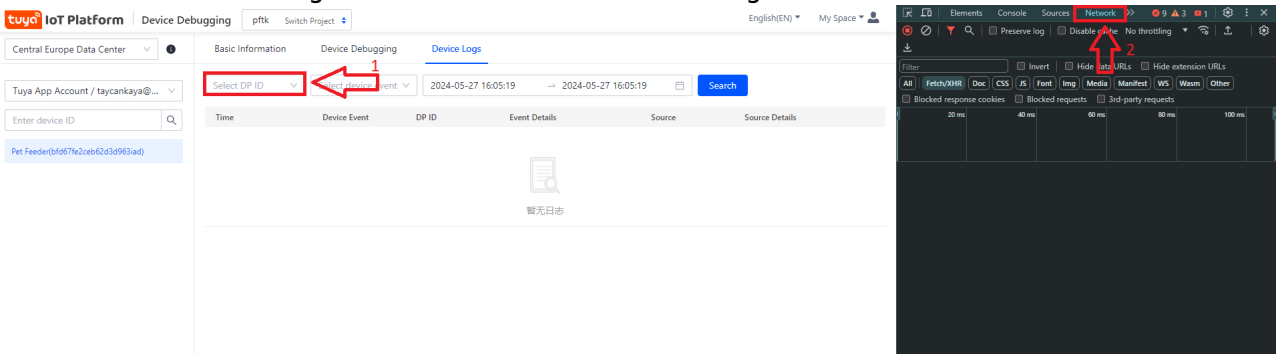


Fig. 34

31. Click on “list”, and navigate to the “Payload” tab, “Code” is the Data Point ID we are looking for. In this case it's 3.

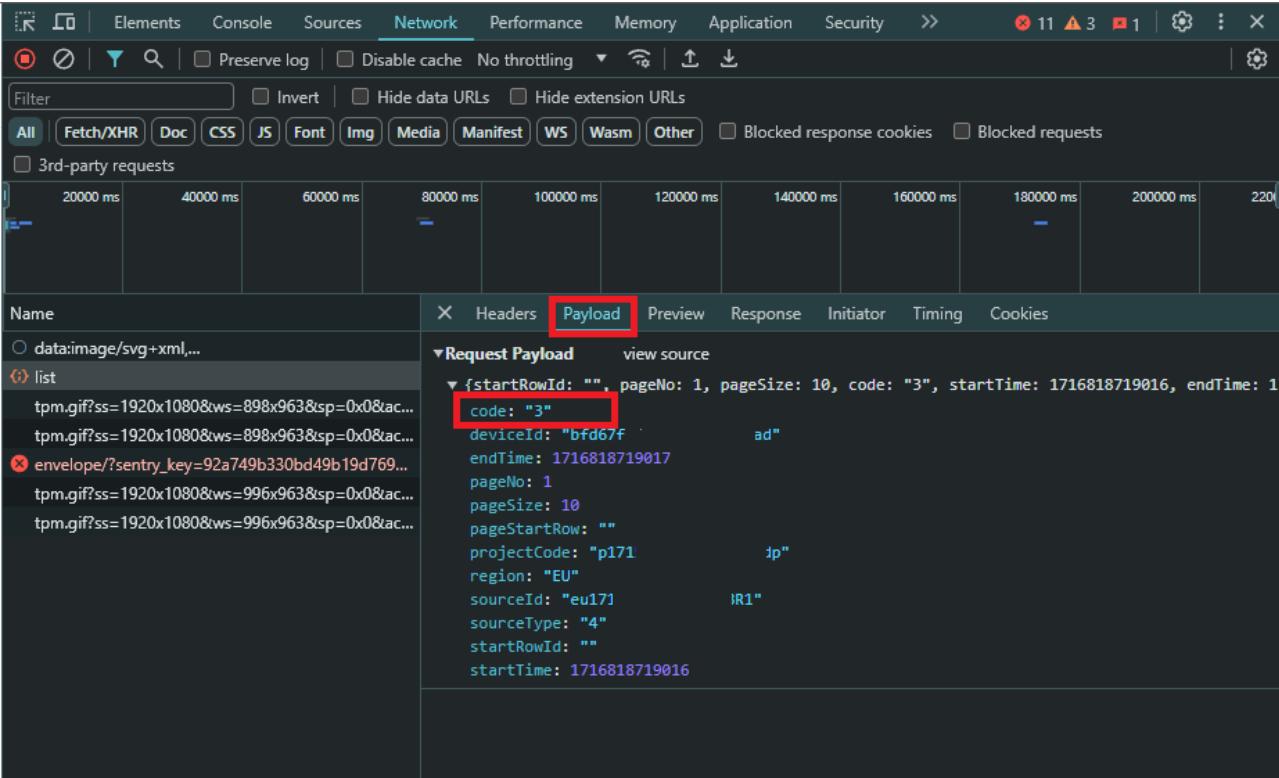


Fig. 35

32. The ID is our Data Point, which is 3.
33. Navigate back to “Device Debugging” tab, make note of the manual_feed’s type and values. It’s an integer with a minimum value of 1, maximum value of 20 and with a step of 1.

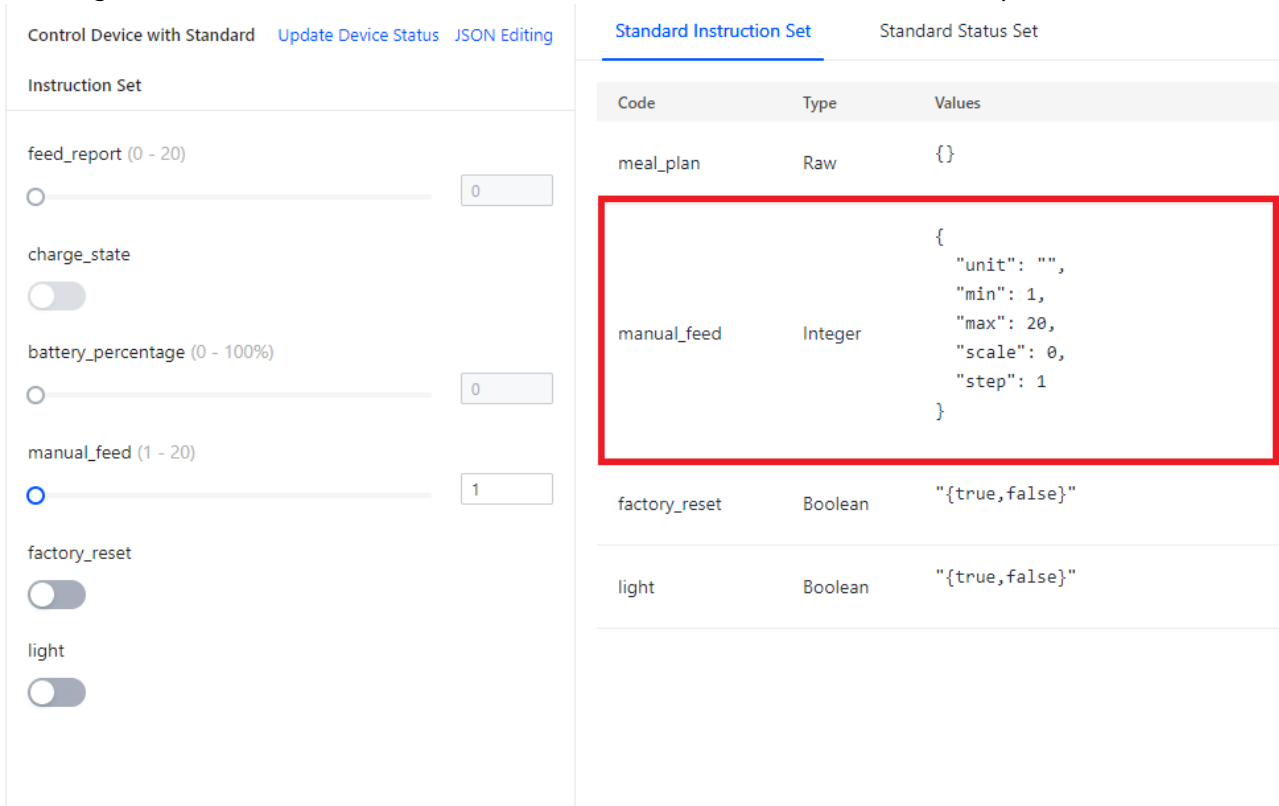


Fig. 36

34. Navigate back to Home Assistant, last time, we were at the Entity Type Selection pop-up. “Settings” → “Devices & Services” → “LocalTuya” → “Configure” → “Add a new Device” → “Submit” → “Submit”.
35. Let’s add the manual feed function to LocalTuya. LocalTuya includes integers in “number”, pick

it from the dropdown menu and submit.

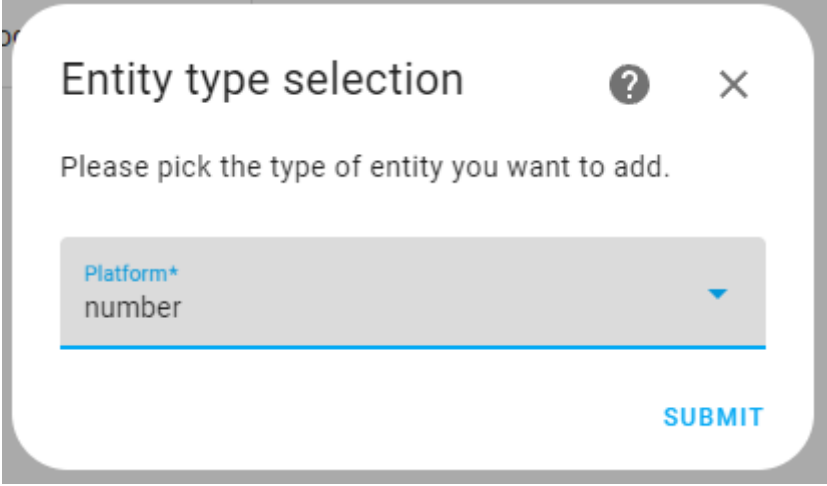
A screenshot of a web interface showing a dialog box titled "Entity type selection". The dialog has a close button (X) and a help button (?) in the top right corner. Below the title, it says "Please pick the type of entity you want to add." There is a dropdown menu with the text "Platform*" and "number" below it. A blue underline is visible under the dropdown. At the bottom right of the dialog is a blue button labeled "SUBMIT".

Fig. 37

36. The "ID" dropdown menu includes DP IDs of the pet feeder, we know 3 is manual feed. From the dropdown menu, pick 3. Call it Manual Feed. The minimum value is 1, maximum value is 20 and the increment between values is 1. Click "Submit".

Configure entity ? ×

Please fill out the details for an entity with type `number` . All settings except for `ID` can be changed from the Options page later.

ID*

3 (value: 3) ▼

Friendly name*

Manual Feed

Minimum Value

1

Maximum Value*

20

Minimum increment between numbers*

1

☐

Restore the last set value in HomeAssistant after a lost connection

☐

Passive entity - requires integration to send initialisation value

Default value when un-initialised (optional)

SUBMIT

Fig. 38

37. On the next step, the entity type selection will appear again, for now, check the “Do not add any more entities” and click “Submit” (we can always add more later).

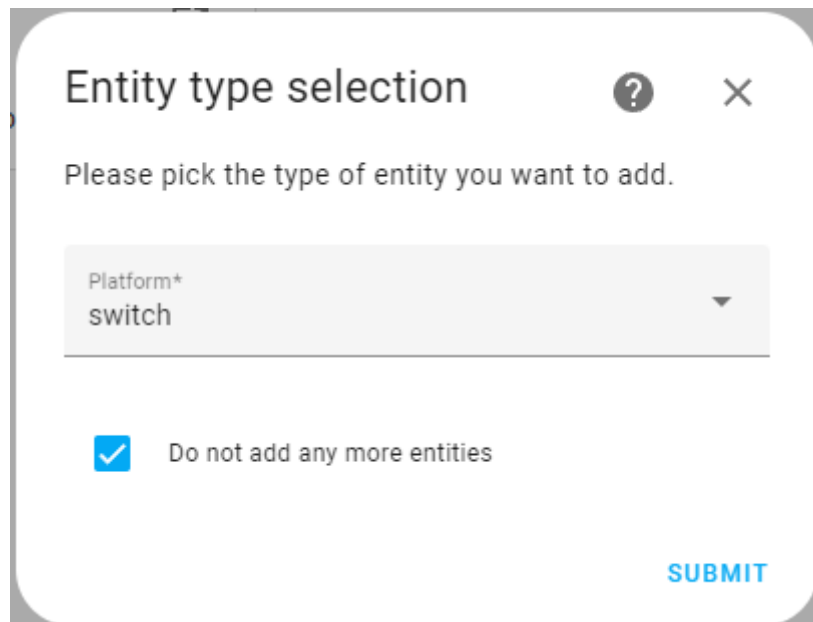


Fig. 39

38. Now let's see if the manual feed entity works. Click on "1 device" below the logo of localtuya.

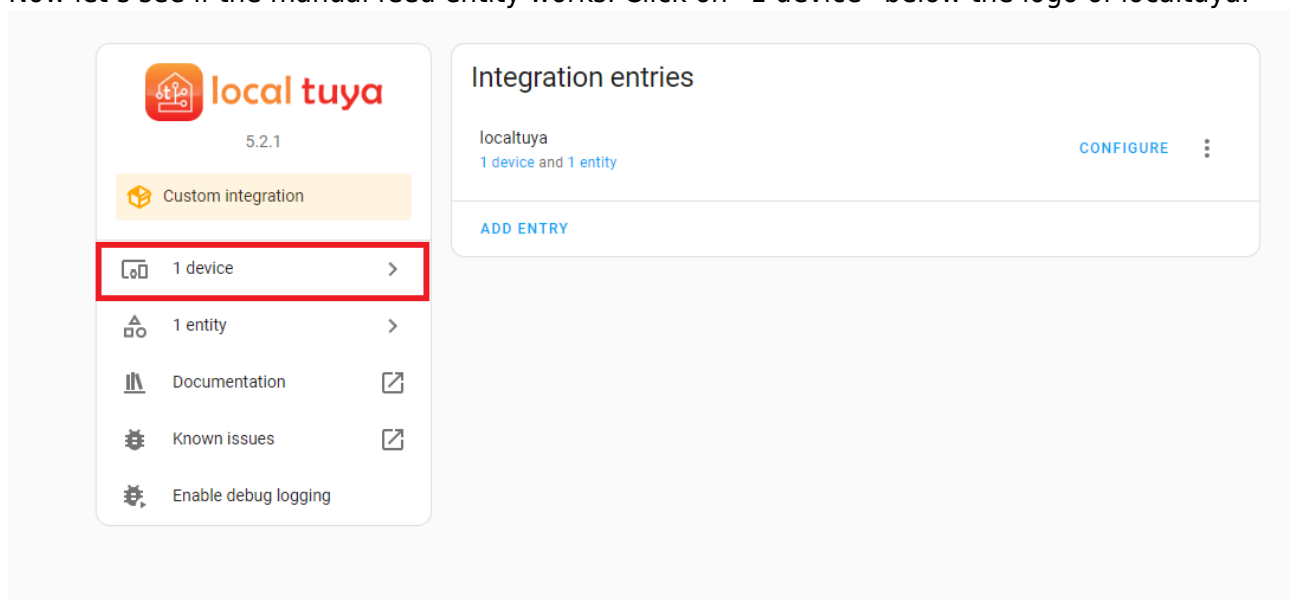


Fig. 40

39. Slide the Manual Feed to any value and check the Pet Feeder is dispensing food.

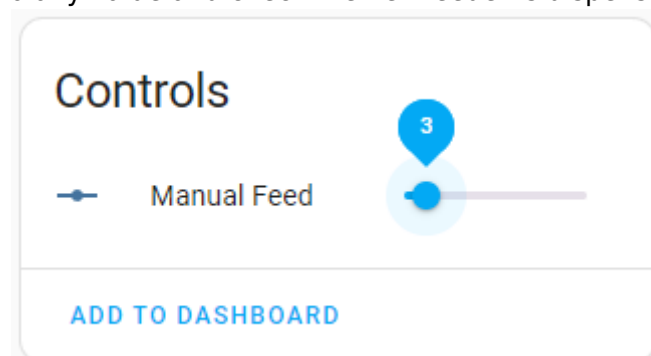


Fig. 41

40. Add more entities by repeating step 26 and beyond.

Last
update:
2024/06/03 10:19 amc:ss2024:bird_feeder:ha_installation https://student-wiki.eolab.de/doku.php?id=amc:ss2024:bird_feeder:ha_installation&rev=1717402747

From:
<https://student-wiki.eolab.de/> - **HSRW EOLab Students Wiki**

Permanent link:
https://student-wiki.eolab.de/doku.php?id=amc:ss2024:bird_feeder:ha_installation&rev=1717402747

Last update: **2024/06/03 10:19**

