

Solar Panel Project

Place: Green FabLab, Kamp-Lintfort.

Photovoltaic (PV) modules:

IBC PySol 270 GX4

Item number = 2204400014

Technical data:

Module dimensions (mm) = 1654 x 989 x 40

Module weight = 18.2Kg

PV modules available = 20units

The current idea is to install 4 sets of 5 PV modules each:

- 2 sets on top of the roof, using an Angle mounting system.
- 2 sets on the green area, using a Flat mounting system on mobile platform mechanism that allows us to tilt the PV modules.

Photovoltaic system layout

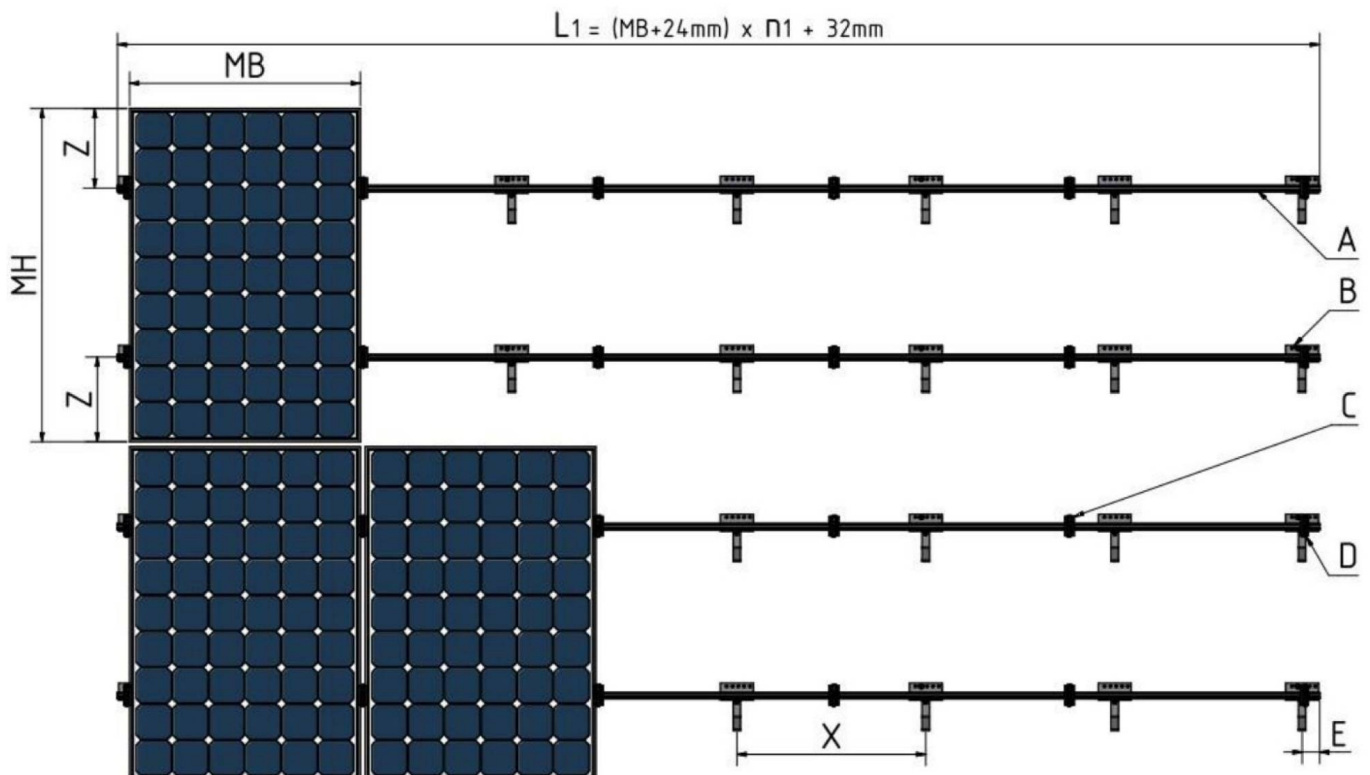


Image: Layout of the IBC TopFix 200 mounting system. taken from the [Installation instructions - IBC TopFix 200](#)

| | Description |
|--|---|
| $L = (M.B + 24 \text{ mm}) \times n + 32 \text{ mm}$ | Carrier rail length = (M.B + 24 mm) × number of modules per row + 32 mm |
| M.B | Module width |

| | |
|-----|--|
| M.H | Module height |
| A | Type TF50+/TF50m/TF60 carrier rail |
| B | Roof hooks |
| C | Middle clamp |
| D | Outside clamp |
| E | Max. 400mm |
| X | X - selected fixing interval (dimensioned using PV Manager software) |
| Z | Max. ¼ of M.H (please observe module manufacturer specifications) |

Note: "Carrier rail" is also called "Support rail" in the manual.

Flat mounting system

List of components

According to the [Installation instructions - IBC TopFix 200](#):

Support rail length = (M.B + 24 mm) × number of modules per row + 32 mm = (989mm + 24 mm) × 5 + 32 mm = 1013 x 5 + 32 mm = 5097mm

There are two lengths: 5200mm and 2100mm, then we use the 5200mm one.

| Item | Amount per set | Item number |
|------------------------------|----------------|-------------|
| Support rail TF60, 5200mm | 2 | 6800100020 |
| End cap Adapter (33-46mm) | 4 | 6700400161 |
| Rail end cap | 4 | 6700300045 |
| Middle Clamp (G4 33-46mm) | 12 | 6700400144 |
| Socket cap screw (M8x16 A2) | 20 | 6900100013 |
| Universal connector AeroFlat | 8 | 6101100057 |

From:
<https://student-wiki.eolab.de/> - **HSRW EOLab Students Wiki**

Permanent link:
https://student-wiki.eolab.de/doku.php?id=solar_panel:start&rev=1624532763

Last update: **2023/01/05 14:38**

