2025/11/29 09:23 1/2 Azam's Project Page

Azam's Project Page

TTGO LoRa32 OLED V1



Important: Please notice that we are using **Version 1** or the TTGO LoRa32 module!

The **TTGO LoRa32 OLED V1 module** is based on the ESP32 microcontroller. The ESP32 itself is capable of communicating via WIFI as well as BLE (Bluetooth low energy). The latter can be used to communicate directly with a smartphone. This TTGO module is further equipped with a LoRa transceiver (SX1276, 868/915 MHz) to provide an additional communication channel. Furthermore it has a nice OLED display to communicate with humans.

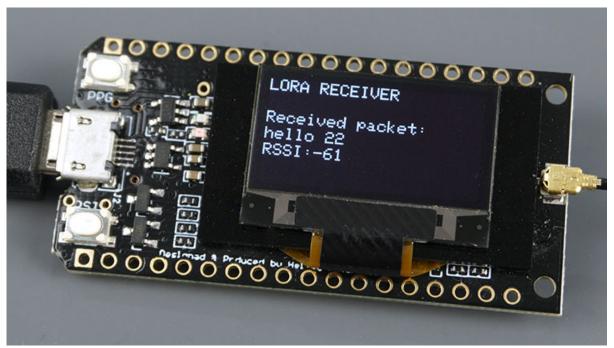



Fig.: TTGO LoRa32 OLED V1.

Image Source: RandomNerdTutorials

Mount the TTGO LoRa32 V1 module on a breadboard


The problem is that the breadboards we are using have very tight clamps to push the pins in.

Last update: 2023/01/05 14:38

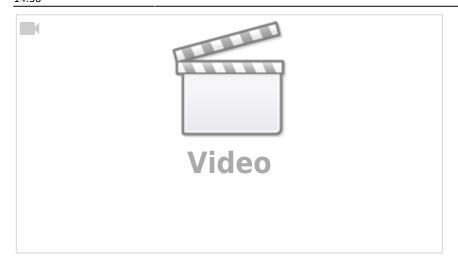

Read analog potentiometer voltages with TTGO LoRa32 V1

A potentiometer is used to simulate an environmental sensor.

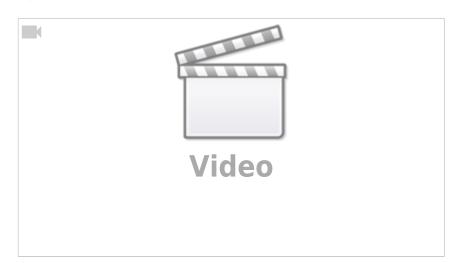

From:

https://student-wiki.eolab.de/ - HSRW EOLab Students Wiki

Permanent link:

https://student-wiki.eolab.de/doku.php?id=emrp2020:azam01:start&rev=1605800935

Last update: 2023/01/05 14:38

